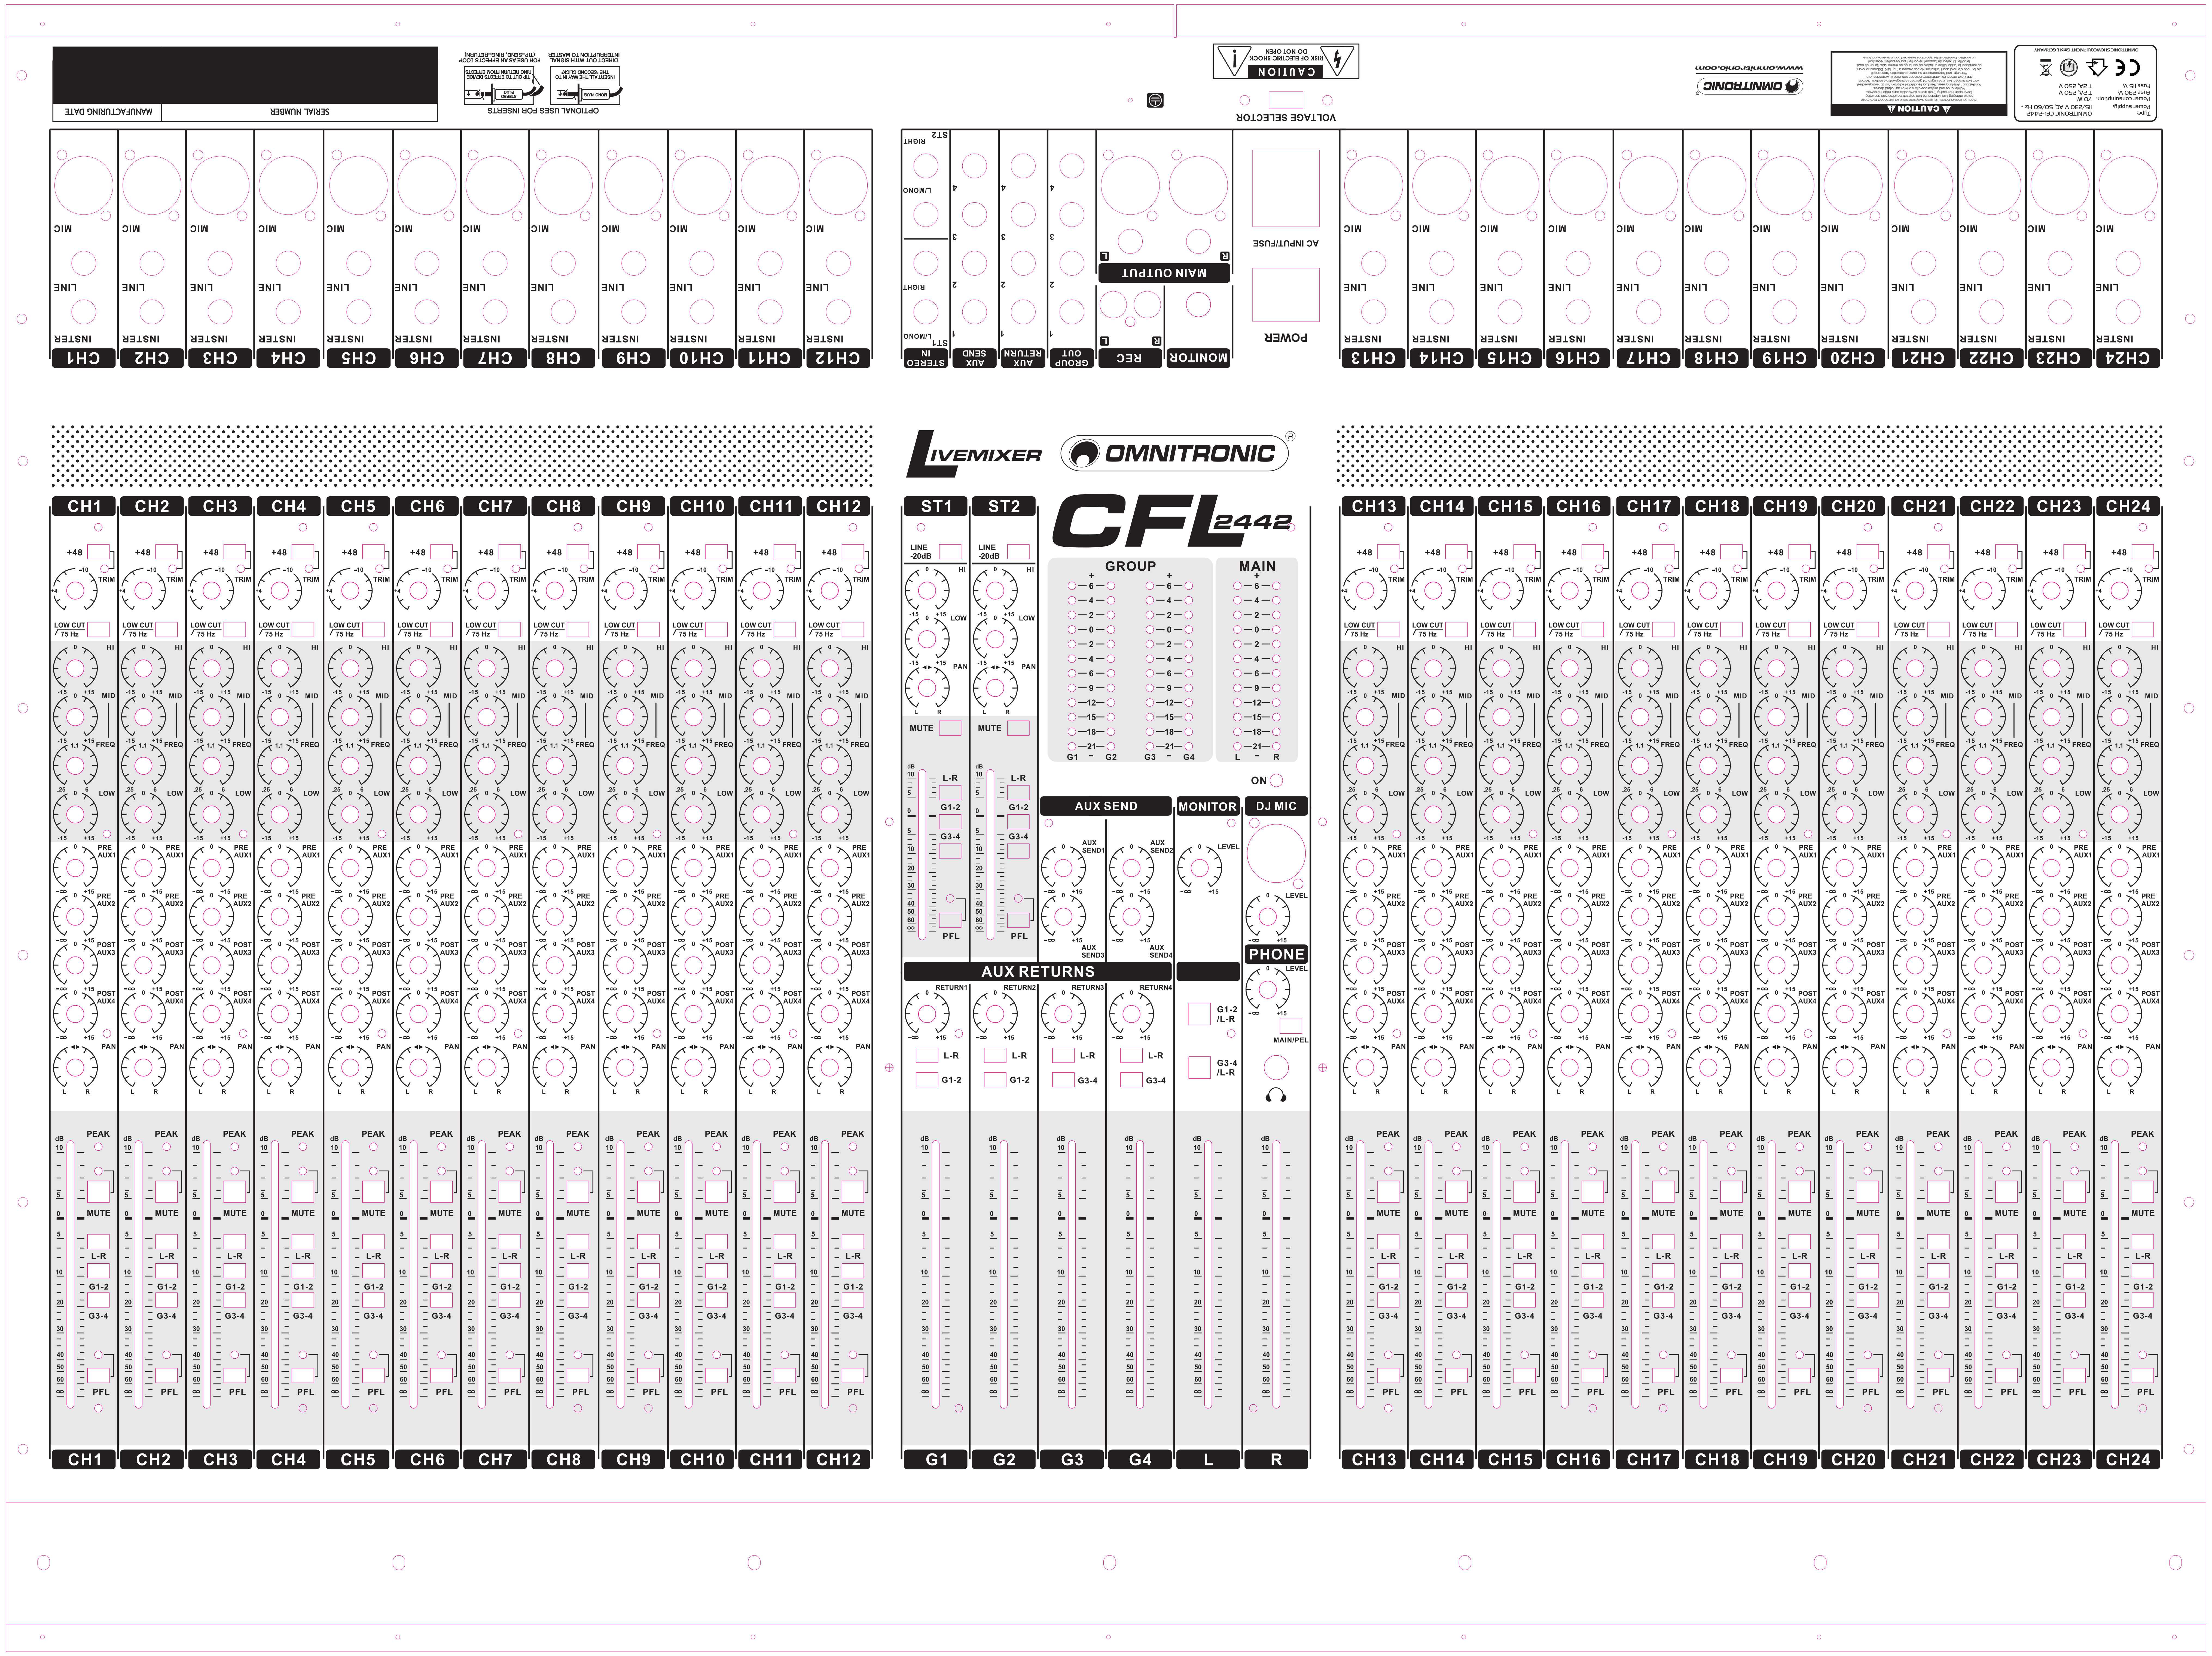
LIVEMIXER
OMNITRONIC
CFL 2442
CH1
CH2
CH3
CH4
CH5
CH6
CH7
CH8
CH9
CH10
CH11
CH12
ST1
ST2
CH13
CH14
CH15
CH16
CH17
CH18
CH19
CH20
CH21
CH22
CH23
CH24
+48
TRIM
LOW CUT 75 Hz
HI
MID
FREQ
LOW
PRE AUX1
PRE AUX2
POST AUX3
POST AUX4
PAN
PEAK
MUTE
L-R
G1-2
G3-4
PFL
LINE -20dB
GROUP
MAIN
ON
AUX SEND
MONITOR
DJ MIC
LEVEL
PHONE
MAIN/PFL
AUX RETURNS
RETURN1
RETURN2
RETURN3
RETURN4
G1-2 /L-R
G3-4 /L-R
G1
G2
G3
G4
L
R
MIC
LINE
INSERT
STEREO IN
AUX SEND
AUX RETURN
GROUP OUT
REC
MONITOR
MAIN OUTPUT
AC INPUT/FUSE
POWER
VOLTAGE SELECTOR
CAUTION
RISK OF ELECTRIC SHOCK DO NOT OPEN
SERIAL NUMBER
MANUFACTURING DATE
OPTIONAL USES FOR INSERTS
www.omnitronic.com
OMNITRONIC CFL-2442