

NEW

OMNITRONIC GEQ Equalizer 2x15-band

2 x 15-band equalizer

- 2-channel version, 2 x 15 frequency controls with 2/3 octave steps
- Short faders
- EQ gain switchable ± 6 dB to ± 12 dB
- Separate level control per channel



No. 10355522

Technical specifications:


Power supply:	6 V, 500 mA
Inputs:	2 x XLR, electronically balanced
Maximum input level:	+22 dBu
Input impedance:	10 kohms
Outputs:	2 x XLR, balanced
Output impedance:	50 ohms
Output gain range:	± 12 dB
Maximum output level:	+9 dBu
Dynamic range D/A converter:	114 dBA
Dynamic range A/D converter:	110 dBA
Sampling frequency:	48/65 kHz
Frequency response:	20 Hz to 20 kHz/20 Hz to 30 kHz
Distortion:	0.005 %
USB port:	type B
Dimensions (WxHxD):	482 x 44 x 128 mm
Weight:	2 kg

NEW

OMNITRONIC GEQ-2310 Equalizer 2x31-band

2 x 15-Band-Equalizer

- 2-channel version, 2 x 31 frequency controls with 1/3 octave steps
- Long sliding frequency controls with center click
- EQ gain switchable ± 6 dB to ± 12 dB
- Hi Cut (3-40 kHz) and Low Cut (10-250 Hz), switchable

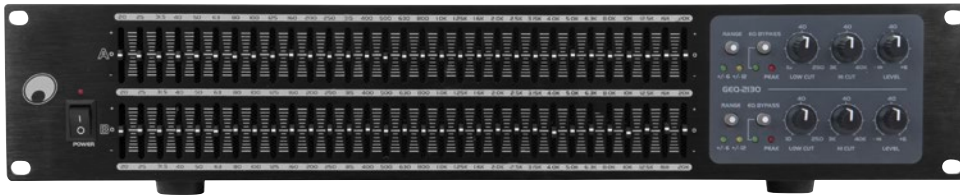

No. 10355526

Technical specifications:


Power supply:	230 V AC, 50 Hz
Power consumption:	20 W
Input impedance:	10/20 kohms (unbal./bal.)
Output impedance:	300/150 kohms (unbal./bal.)
In/Out connectors:	XLR, jack
S/N ratio:	>95 dB
Crosstalk:	>90 dB
Distortion:	<0.01 %
Frequency range:	20-20000 Hz, ± 0.5 dB
Output level:	-- to +6 dB
Control range:	± 6 dBu or ± 15 dBu
Frequencies:	2 x 20/25/31.5/40/50/63/80/100/125/160/200/250/315/400/500/630/800 Hz, 1/1.25/1.6/2/2.5/3.15/4/5/6.3/8/10/12.5/16/20 kHz
Hi Cut:	3 - 40 kHz
Low Cut:	10 - 250 Hz
Dimensions (WxDxH):	483 x 150 x 96 mm
Weight:	2.6 kg

NEW

OMNITRONIC GEQ-2310XL Equalizer 2x31-band

2 x 31-Band-Equalizer

- 2-channel version, 2 x 31 frequency controls with 1/3 octave steps
- XL (50 mm) sliding frequency controls with center click
- EQ gain switchable ± 6 dB to ± 15 dB
- Low cut, switchable

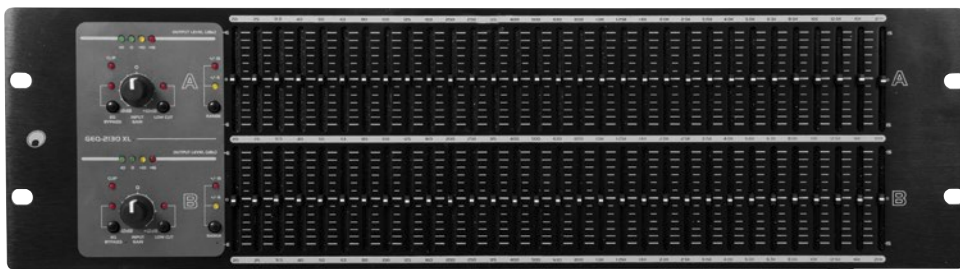

No. 10355536

Technical specifications:

Power supply:	230 V AC, 50 Hz
Power consumption:	20 W
Input impedance:	10/20 kohms (unb./bal.)
Output impedance:	300/150 kohms (unb./bal.)
In/Out connectors:	XLR, jack, screw connectors
S/N ratio:	>95 dB
Crosstalk:	>90 dB
Distortion:	<0.01 %
Frequency range:	20-20000 Hz, ± 0.5 dB
Output level:	± 12 dB
Control range:	± 6 dBu or ± 15 dBu
Frequencies:	2 x 20/25/31.5/40/50/63/80/100/125/160/200/250/315/400/500/630/800 Hz, 1/1.25/1.6/2/2.5/3.15/4/5/6.3/8/10/12.5/16/20 kHz
Low cut:	200 Hz
Dimensions (WxDxH):	483 x 175 x 133 mm
Weight:	4.6 kg