

OMNITRONIC GEQ-215 Equalizer 2x15-band

No. 10355520 silver
No. 10355521 black

- + 2-channel equalizer
- + 2 x 15 frequency controls with 2/3 octave steps
- + Switchable low cut filter
- + XLR/6.3 mm jack connectors



- 2-channel version, 2 x 15 frequency controls with 2/3 octave steps • Short sliding frequency controls with center click • EQ gain switchable ± 6 dB to ± 15 dB • Switchable low cut filter • Separate level control per channel • Bypass switch allows instant comparison of the original sound with the equalized sound • 7-fold LED level meter with clip indicator • Inputs and outputs via 6.3 mm jack sockets (1/4") and XLR sockets • Groundlift switch • Rack installation, 1 U




Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	10 W
Input impedance:	10/20 kohms (unb./bal.)
Output impedance:	300/150 kohms (unb./bal.)
In/Out connectors:	XLR, jack
S/N ratio:	>95 dB
Crosstalk:	>90 dB
Distortion:	<0.01 %
Frequency range:	20 Hz - 20 kHz, ± 0.5 dB
Output level:	- ~ to +6 dB
Control range:	± 6 dB or ± 15 dB
Frequencies:	2x 25/40/63/100/160/250/400/630 Hz, 1/1.6/2.5/4/6.3/10/16 kHz
Low Cut:	30 Hz, -3 dB
Dimensions (WxDxH):	483 x 175 x 44 mm
Weight:	3 kg

OMNITRONIC GEQ-231 Equalizer 2x31-band

No. 10355525

- + 2 x 31 frequency controls with 1/3 octave steps
- + Hi Cut and Low Cut, switchable
- + Inputs and outputs via 6.3" jack/XLR sockets/screw terminals

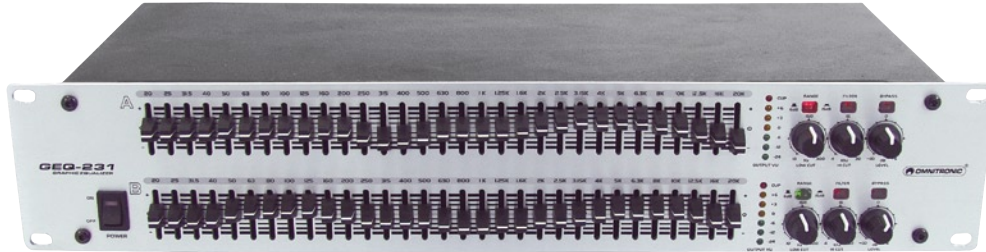

- 2-channel version, 2 x 31 frequency controls with 1/3 octave steps • Long sliding frequency controls with center click • EQ gain switchable ± 6 dB to ± 15 dB • Hi Cut (4-30 kHz) and Low Cut (10-300 Hz), switchable • Separate level control per channel • Bypass switch allows instant comparison of the original sound with the equalized sound • 7-fold LED level meter with clip indicator • Inputs and outputs via 6.3 mm jack sockets (1/4"), XLR sockets and screw terminals • Groundlift switch • Rack installation, 2 U

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	10 W
Input impedance:	10/20 kohms (unb./bal.)
Output impedance:	300/150 kohms (unb./bal.)
In/Out connectors:	XLR, jack, screw connectors
S/N ratio:	>95 dB
Crosstalk:	>90 dB
Distortion:	<0.01 %
Frequency range:	20 Hz - 20 kHz, ± 0.5 dB
Output level:	- ~ to +6 dB
Control range:	± 6 dBu or ± 15 dBu
Frequencies:	2x 20/25/31.5/40/50/63/80/100/125/160/200/250/315/400/500/630/800 Hz, 1/1.25/1.6/2.5/3.15/4/5/6.3/8/10/12.5/16/20 kHz
Hi Cut:	4 - 30 kHz
Low Cut:	10 - 300 Hz
Dimensions (WxDxH):	483 x 175 x 88 mm
Weight:	3 kg

OMNITRONIC GEQ-215 XL Equalizer 2x15-band

No. 10355530

- + Switchable low-cut filter
- + XL (50 mm) sliding controls
- + Inputs and outputs via 6.3" jack/XLR sockets/screw terminals



- 2-channel version, 2 x 15 frequency controls with 2/3 octave steps • XL (50 mm) sliding frequency controls with center click • EQ gain switchable ± 6 dB to ± 15 dB • Switchable low cut filter • Separate level control per channel • Bypass switch allows instant comparison of the original sound with the equalized sound • 7-fold LED level meter with clip indicator • Inputs and outputs via 6.3 mm jack sockets (1/4"), XLR sockets and screw terminals • Groundlift switch • Rack installation, 2 U



Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	10 W
Input impedance:	10/20 kohms (unb./bal.)
Output impedance:	300/150 kohms (unb./bal.)
In/Out connectors:	XLR, jack, screw connectors
S/N ratio:	>95 dB
Crosstalk:	>90 dB
Distortion:	<0.01 %
Frequency range:	20 Hz - 20 kHz, ± 0.5 dB
Output level:	- ~ to +6 dB
Control range:	± 6 dBu or ± 15 dBu
Frequencies:	2x 25/40/63/100/160/250/400/630 Hz, 1/1.6/2.5/4/6.3/10/16 kHz
Low Cut:	30 Hz, -3 dB
Dimensions (WxDxH):	483 x 175 x 88 mm
Weight:	3 kg