


eurolite®

OFF
ON

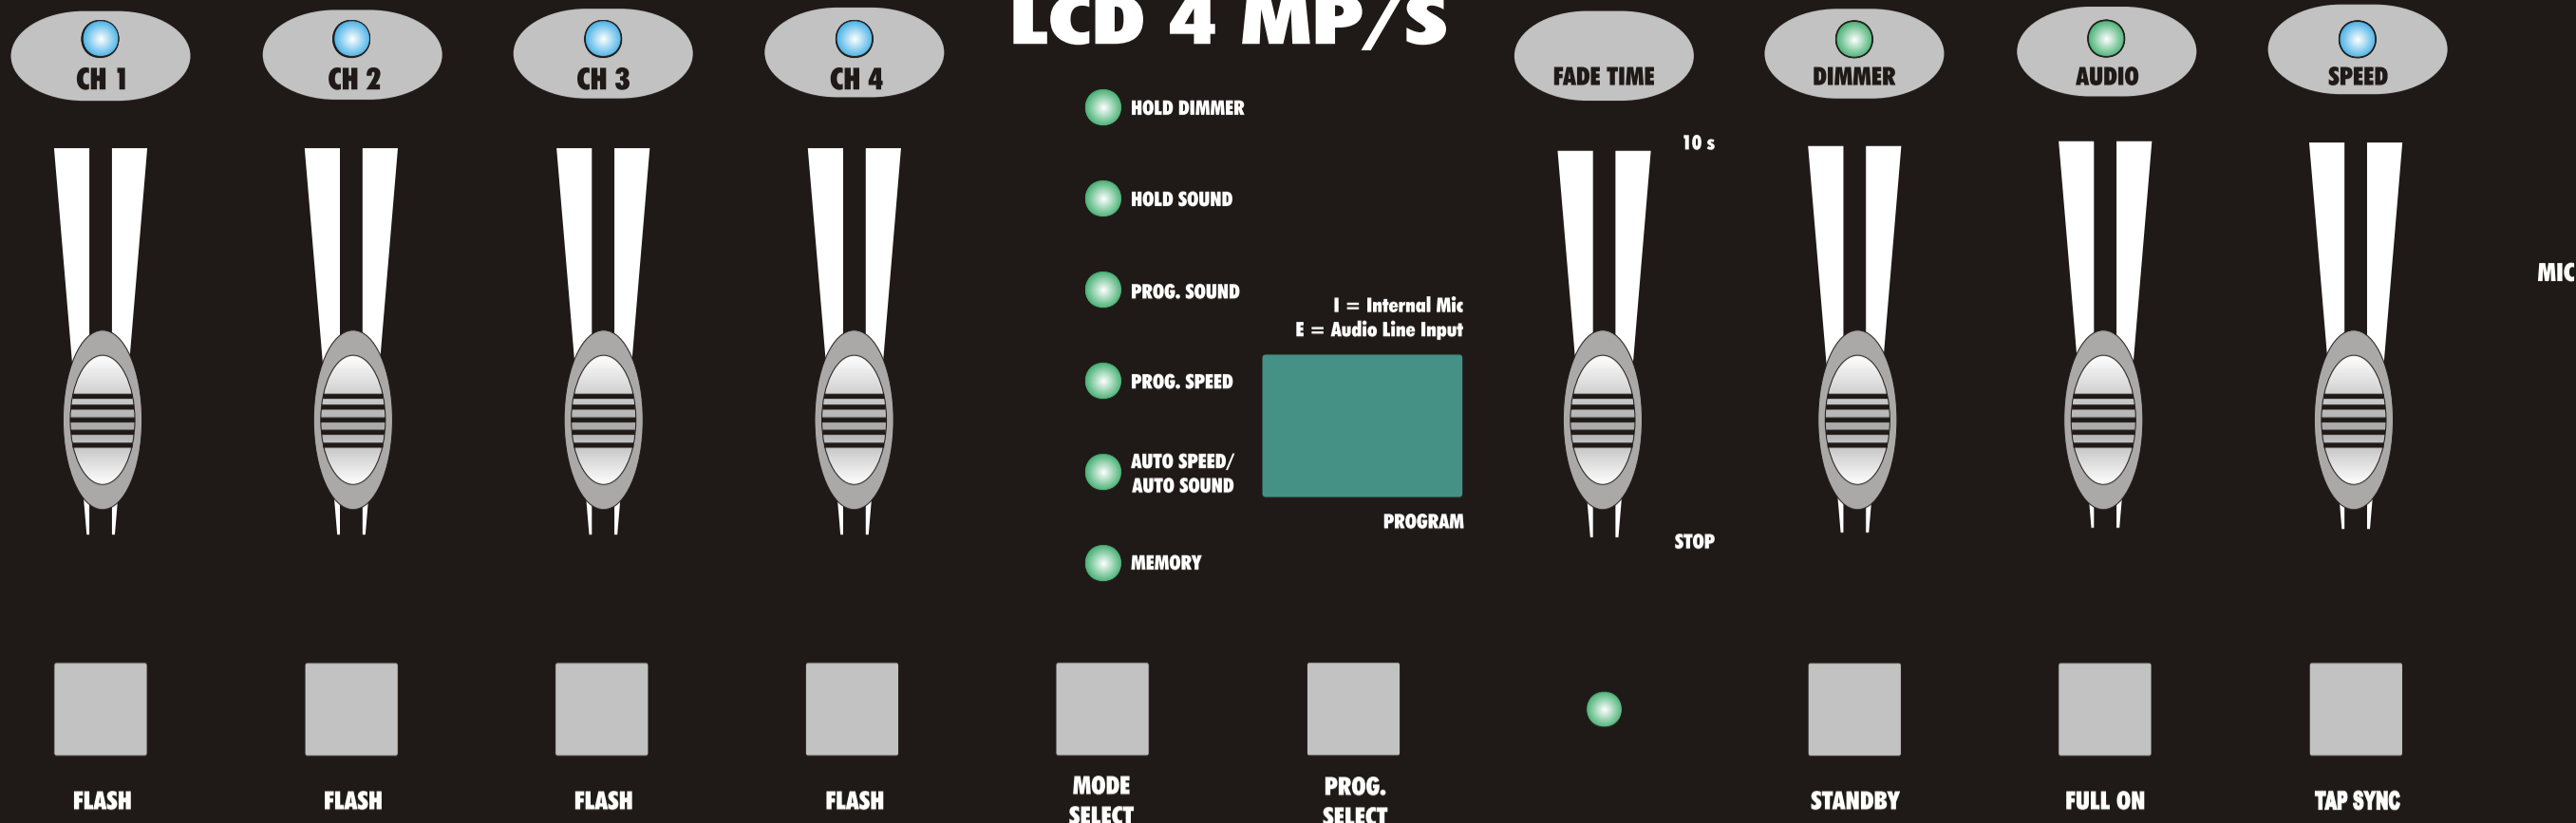

LCD 4 MP/S

- HOLD DIMMER
- HOLD SOUND
- PROG. SOUND
- PROG. SPEED
- AUTO SPEED / AUTO SOUND
- MEMORY

I = Internal Mic
E = Audio Line Input

PROGRAM

STOP

MIC

FLASH

FLASH

FLASH

FLASH

MODE SELECT

PROG. SELECT

STANDBY

FULL ON

TAP SYNC

SPECIAL


- 42 built-in chasing programs.
- Hold dimmer / Hold sound/Prog sound / Prog speed / Auto sound / Auto speed / Memory Normal speed or under controlled by tap sync .
- By built-in microphone or line input (100 mV-1vPP)
- Full on and flash ,stand by.

MODE FUNCTION

Hold dimmer	• Channel output is controlled by "channel dimmer" or "master dimmer control".
Hold sound	• Controlled by "channel dimmer" and "music level".
Prog sound	• Any one of 42 per-set program can be select by " prog select"press"prog select" button once more, Program will be increased one; press "prog select" + "mode select", program will be reversed one.
Prog speed	• Operation according to the prog sound, chase speed is controlled by "speed control" or " tap sync".
Auto speed	• Operation according to the prog speed . Each program will be executed eight times then next program.
Auto sound	• Operation according to prog sound. Each program will be executed eight times then next program.

MODE FUNCTION

Memory	• Up to 32 steps can be memorized . • "Prog select" + stand by" you can select desire operating mode from program / manual / Auto sound/ Auto speed corresponding to digit indication "PR, SL, RS " And "RP" .
"PR "	• You can make program in this way till "32" appears.
"SL "	• "Prog select" once more , program will be executed one step.
"RS "	• Program is executed according to the music rhythms.
"RP "	• Program is executed automatically.

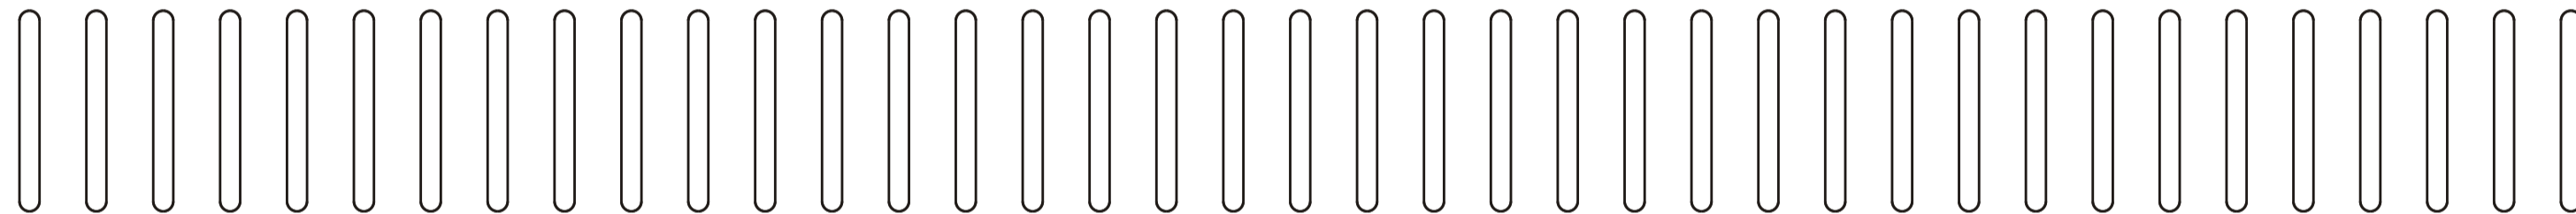


Typ/Type: LCD-4 MP/S
 Spannung/Power supply: 230 V AC, 50 Hz ~
 Max. Gesamtleistung/Max. power output: 3680 W
 Max. Gesamtstrom/Max. total current: 16 A
 Max. Nennleistung/Kanal/Max. output/ch.: 1150 W
 Max. Nennstrom/Kanal/Max. current/channel: 5 A
 Sicherung/Fuse: F 6.3 A, 250 V

Vor Gebrauch Anleitung lesen.
 Gerät vor Feuchtigkeit schützen!
 Gefahr eines elektrischen Schlag.
 niemals das Gerät öffnen! Im
 Geräteinnern befinden sich keine
 zu wartenden Teile. Wartungs- und
 Servicearbeiten nur durch autori-
 sierten Fachhandel!
 Read user manual before use.
 Keep away from moisture! Risk of
 electric shock, never open the
 housing! There are no serviceable
 parts inside the device. Mainte-
 nance and service operations only
 by authorized dealers.

CE

eurolite®
 MADE IN CHINA www.eurolite.de

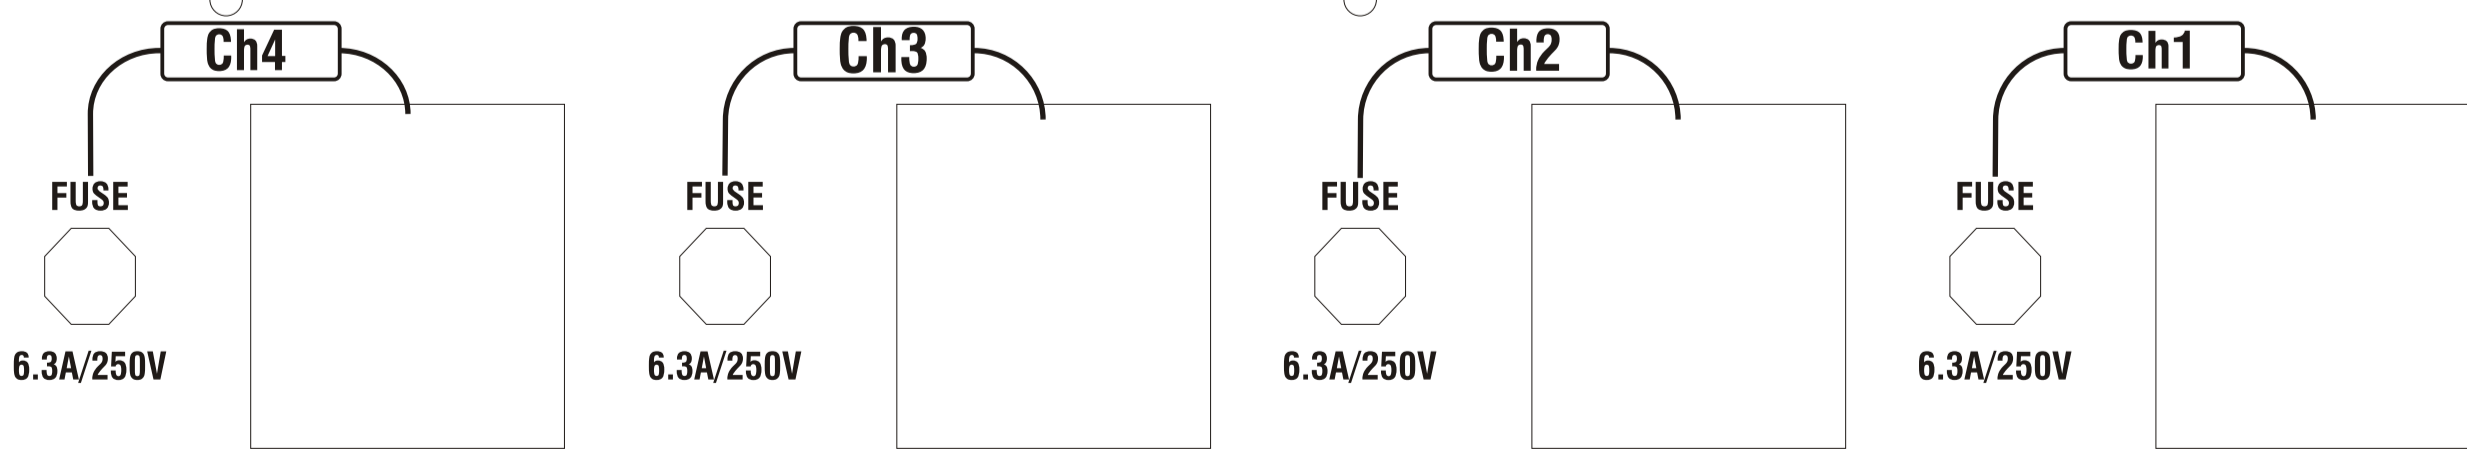

AUDIO INPUT
100mV-1VPP

Pin-occupation
 Pin 1: Channel 1
 Pin 2: Channel 2
 Pin 3: Channel 3
 Pin 4: Channel 4
 Pin 5: Neutral
 Pin 6: Neutral

POWER INPUT: AC 230V~ 50Hz, 16A
 POWER OUTPUT: 5A / PER CHANNEL
 TOTAL: 16A

CAUTION
 RISK OF ELECTRIC SHOCK
 DISCONNECT INPUT POWER
 DON'T OPENING

N'OUVREZ PAS. RISQUE DE CHOCELECTRIQUE
 WARNING: THIS APPARATUS MUST BE EARTHED

CE