




100V IP65

### OMNITRONIC OD Wall speaker 2x

Weatherproof wall speaker pair

- Passive (8 ohms) and active PA speaker systems with an excellent sound for general applications
- 2-way system with 10/13.5/16.5 cm cm woofer (4/5.25/6.5") and 1.5/2.5 cm tweeter (0.5/1")
- Weatherproof (IP65) plastic cabinet with metal grille and cover for the connectors (passive models)
- Panning and tilting mounting bracket allows ceiling or wall installation in most varying angles

No. 11036914 .....	OD-4T, black
No. 11036915 .....	OD-4T, white
No. 11036920 .....	ODT-5, black
No. 11036921 .....	ODT-5, white
No. 11036926 .....	OD-6T, black
No. 11036927 .....	OD-6T, white

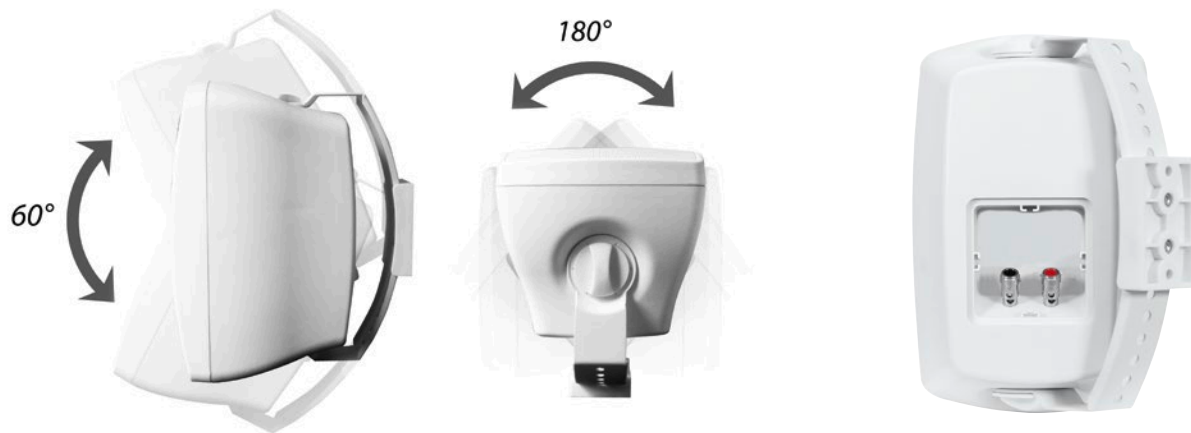

#### Technical specifications:

	OD-4T	OD-5T	OD-6T
Device:	OD-4T	OD-5T	OD-6T
Input:	100 V or 8 ohms	100 V or 8 ohms	100 V or 8 ohms
Components:	10 cm woofer (4"), 1.5 cm tweeter (0.5")	13.5 cm woofer (5.25"), 1.5 cm tweeter (0.5")	16.5 cm woofer (6.5"), 2.5 cm tweeter (1")
Connections:	screw terminals	screw terminals	screw terminals
Rated power:	2/4/8/16 W RMS	2/4/8/16 W RMS	4/8/16/32 W RMS
Sensitivity:	88 dB (1 W, 1 m)	89 dB (1 W, 1 m)	90 dB (1 W, 1 m)
Max. SPL:	91 dB (1 m)	92 dB (1 m)	93 dB (1 m)
Impedance:			8 ohms
Frequency range:	100 Hz - 20 kHz	80 Hz - 20 kHz	50 Hz - 20 kHz
Dispersion angle (HxV):	170° x 170°	170° x 170°	170° x 170°
Dimensions (L x W x H):	125 x 125 x 195 mm	163 x 160 x 255 mm	190 x 195 x 290 mm
Weight (piece):	1.3 kg (incl. bracket)	2.2 kg (incl. bracket)	3 kg (incl. bracket)