

ACTIVE

OMNITRONIC AS-470 Active system

Active complete system, 470 W RMS

- 2-way satellite system with 2 tops and subwoofer
- Perfectly tuned system for demanding home users, DJ home recording, party etc.
- Aux input (RCA), ideal for portable music players (e.g. iPod)
- Line input (2 x XLR)
- Mic input (XLR/6.3 mm jack)



No. 11038805

Technical specifications:


Top:	
Rated power:	60 W RMS
Program power:	80 W
Components:	16.5 cm woofer (6.5"), dome tweeter
Connections:	1 Speaker socket
Sensitivity (1 W/m):	90 dB
Max. SPL (1 m):	107 dB
Impedance:	4 ohms
Frequency range:	150 Hz - 18 kHz
Dispersion angle (1 kHz):	60° x 60°
Crossover frequency:	3.5 kHz
Dimensions (H x W x D):	350 x 210 x 220 mm
Weight:	5 kg
Subwoofer:	
Rated power:	350 W RMS
Components:	30 cm woofer (12")
Inputs:	2 x XLR (line), 2 x RCA (aux), 1 x Mic (XLR/6.3 mm jack)
Outputs:	2 x Speaker
Mixed output:	2 x RCA
Sensitivity (1 W/m):	96 dB
Max. SPL (1 m):	122 dB
Impedance:	4 ohms
Frequency range:	30 - 250 Hz
Dimensions (H x W x D):	450 x 380 x 528 mm
Weight:	31 kg
Amplifier:	
Power supply:	115/230 V AC, 50/60 Hz ~
Power consumption (max.):	700 W
Total power output:	470 W RMS
Nominal power output satellite:	2 x 60 W RMS
Nominal power output subwoofer:	350 W RMS
Min. input sensitivity:	0.775 V
LED indicators:	Power, Protect, Clip
Protection circuits:	Short-circuit, DC voltage, thermal protection circuit, soft start, opto-limiter and subsonic filter
Active crossover:	
Crossover frequency:	200 Hz

ACTIVE

OMNITRONIC AS-500 Active system

Convincing compact active PA system, 500 watts RMS

- Mobile subwoofer/satellite system with class D circuitry (500 watts RMS)
- Provides perfect sound and good level stability - ideal for solo entertainers, small bands and mobile DJs
- Microphone input (combo XLR/6.3 mm jack)
- Aux input (3.5 mm jack/RCA), ideal for portable music players (e.g. iPod)
- 5-band equalizer for fine-tuned sound of the master signal
- PowerCon input, power cable included

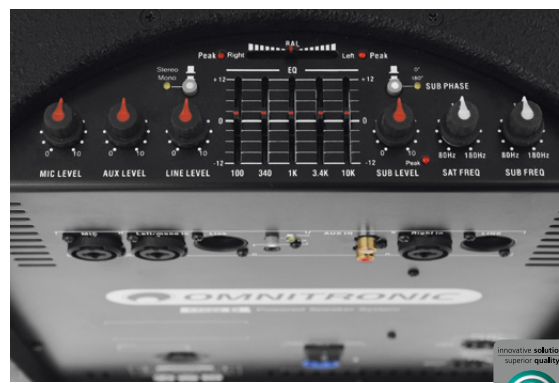

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption (max.):	600 W
Power output sine:	
Subwoofer:	300 W RMS
Satellite speakers:	2 x 100 W RMS
Components:	
Subwoofer:	30 cm woofer (12")
Satellite speakers:	2 x 16.5 cm woofer (6.5"), 2 x 2.5 cm neodymium tweeter (1")
Sensitivity:	
Subwoofer:	95 dB (1 W, 1 m)
Satellite speakers:	93 dB (1 W, 1 m)
Max. SPL:	
Subwoofer:	122 dB (1 m)
Satellite speakers:	112 dB (1 m)
Frequency range:	
Subwoofer:	35 - 140 Hz
Satellite speakers:	140 Hz - 20 kHz
Inputs:	
Line:	combination XLR/6.3 mm jack L/R
Aux:	3.5 mm jack/stereo RCA
Mic:	combination XLR/6.3 mm jack
Outputs:	
Line:	XLR L/R (feed-through output)
Speaker:	2 x Speaker, 8 ohms
Protection circuits:	Short-circuit, overheat, overload, overcurrent
Dimensions (LxWxH):	
Subwoofer:	552 x 375 x 444 mm
Satellite speakers:	233 x 231 x 318 mm
Total weight:	47 kg

No. 11038808..... AS-500

No. 11038809..... Wheel board for AS-500 Active system