



PSSO CLA-228 LINE ARRAY top

No. 11040900

- + LGA-tested
- + Easy handling
- + Ultra lightweight housing
- + Specially designed waveguide
- + Simulation software as free download

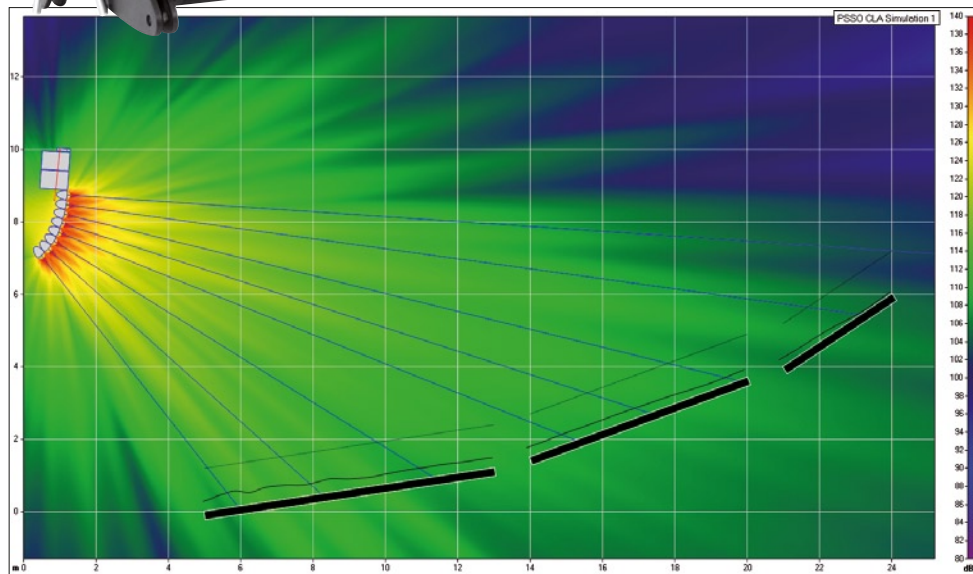

- Compact line array for permanent installations and touring purposes
- Time saving 2-man installation directly from the transport case
- Lightweight housing due to high-quality plastic
- Low weight of the whole construction and reduced demands for the flying points
- Elegant housing design for avoiding resonance and standing waves
- Two powerful 20 cm low/mid neodymium magnets (2 x 8")
- 4.4 cm neodymium driver (1.73") with titanium diaphragm
- Specially designed waveguide
- Maximum efficiency due to biamped control
- Wide horizontal dispersion angle of 100°
- Curving adjustable between 0° and 12°
- Easy rigging with captive quick release pins
- Tight locking pins eliminating vibration noise
- Flying hardware regularly tested by an independent and accredited testing institute
- NEUTRIK® Speakon® sockets
- PC software in the manufacturer's download section

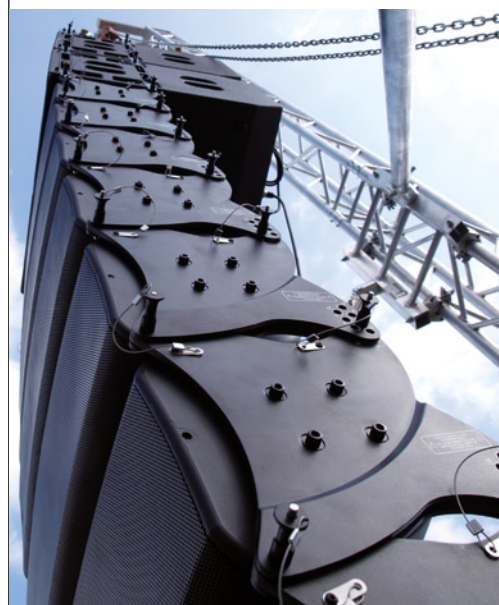

Technical specifications:

MF rated power:	300 W RMS
HF rated power:	60 W RMS
MF program power:	600 W
HF program power:	120 W
Components:	2 x 20 cm woofer (2 x 8"), 4.4 cm driver (1.73")
Connections:	2 Speakon sockets (4-pin)
MF sensitivity (1 W/m):	96 dB
HF sensitivity (1 W/m):	104 dB
MF max. SPL (1 m):	120 dB
HF max. SPL (1 m):	121 dB
Impedance:	MF 16 ohms / HF 16 ohms
Frequency range:	80 Hz - 18 kHz
Crossover frequency:	1.3 kHz
Dispersion angle (1 kHz):	H = 100°, V = 3°
Dimensions (H x W x D):	285 x 670 x 285 mm
Weight:	15 kg

Accessories:

Flightcase for 8x CLA-228	No. 11040998
Flightcase for 4x CLA-228	No. 11040999
SOMMER EL20U425-0050 Speakon 4x2,5mm ²	No. 30227630
SOMMER EL20U425-1500 Speakon 4x2,5mm ²	No. 30227633
Flying bracket CLA-228/CLA-115	No. 11040950