




Ringschrauben Ring bolts DIN 580

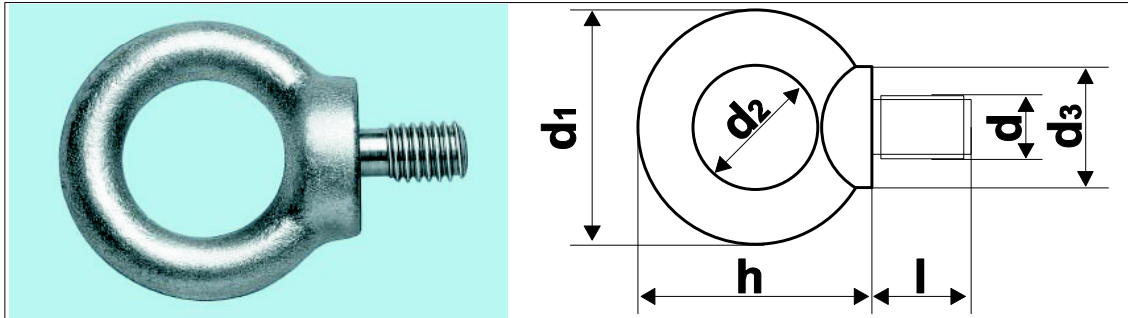

d	M6	M8	M10	M12	M16	M20	M24	M30
d1 mm	36	36	45	54	63	72	90	108
d2 mm	20	20	25	30	35	40	50	60
d3 mm	20	20	25	30	35	40	50	65
h mm	36	36	45	53	62	71	90	109
i mm	13	13	17	20,5	27	30	36	45

Höchstbelastung durch das anzuhängende Stück in kg für DIN 580
Maximum load by the suspended item in kg for DIN 580

			M8	M10	M12	M16	M20	M24	M30	M36
Zugrichtung Direction of pull	einfach single		140	230	340	700	1200	1800	3200	4600
	zweifach double		100	170	240	500	860	1290	2300	3300