



EUROLITE TB-616X T-Bar 2m 16pin IN/OUT

For problem-free installations

- Makes the installation of your lighting system really easy
- Installed directly at the stand or crossbeam
- Fully wired



No. 60003654

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Max. power output:	21600 W
Max. total current:	96 A
Max. output/channel:	3680 W
Max. current/channel:	16 A
Max. load per fixation point:	5 kg
Max. spaced bracerload:	30 kg
Max. centered bracerload:	25 kg
TV spigot:	D = 28 mm
Dimensions (LxWxH):	2000 x 40 x 60 mm
Weight:	5 kg



EUROLITE TB-4X T-Bar

For problem-free installations

- Makes the installation of your lighting system really easy
- Fully wired with DMX-splitter
- Connection via Powercon In/Out-socket



No. 60003659

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Max. power output:	2300 W
Max. total current:	10 A
Max. output/channel:	2300 W
Max. current/channel:	10 A
Max. load per fixation point:	7.5 kg
Max. spaced bracerload:	30 kg
Dimensions (LxWxH):	1500 x 75 x 165 mm
Weight:	5 kg




APSA Distributor 4-fold ALU bk

Power distributor

- With 4/6/8 sockets
- Without child protection
- Without connection cable

- No. 30240072 4-fold
- No. 30240082 6-fold
- No. 30240092 8-fold

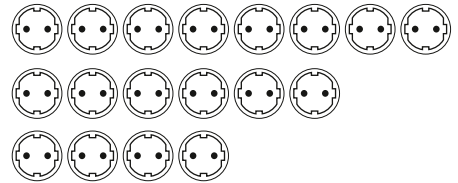


EUROLITE Distributor 6-fold ALU bk

Power distributor

- With 4/6/8 sockets
- Without child protection
- Without connection cable

- No. 30240070 4-fold
- No. 30240080 6-fold
- No. 30240090 8-fold

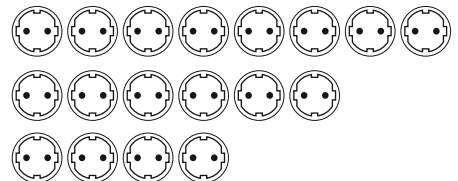

EUROLITE Distributor 3-fold IP44 bk 1.5m

Power distributor

- With 3/6 sockets and illuminated, red switch
- Without child protection
- With connection cable
- Cable crosssection: H05VV-F 3G1.5 mm²

- No. 30240115 3-fold, 1.4 m
- No. 30240117 3-fold, 3 m
- No. 30240119 3-fold, 5 m
- No. 30240154 6-fold, 1.5 m
- No. 30240153 6-fold, 3 m
- No. 30240156 6-fold, 5 m
- No. 30240158 6-fold, 10 m

