




EUROLITE Theatre Spot bk
Theatre Spot for use at close range

- High-quality theatre spot
- Focusable from 10° to 40°
- Incl. frame for color filter and protective mesh

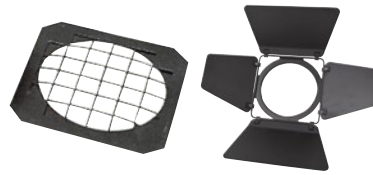

| | |
|--------------------|-----------------------------|
| No. 41900520 | 300/500 fresnel |
| No. 41900525 | 300/500 antihalo |
| No. 41900533 | 300/500 color filter frame |
| No. 41900525 | 300/500 barn doors |
| No. 41901020 | 650/1000 fresnel |
| No. 41901023 | 650/1000 antihalo |
| No. 41901027 | 650/1000 filter frame |
| No. 41901029 | 650/1000 color filter frame |
| No. 41901050 | 2000 fresnel |
| No. 41901053 | 2000 antihalo |
| No. 41901060 | 2000 color filter frame |
| No. 41901062 | 20000 barn doors |

Technical specifications:

| Device: | Spot 300/500 | Spot 650/1000 | Spot 2000 |
|---------------------|--------------------|--------------------|--------------------|
| Power supply: | 230 V AC, 50 Hz ~ | 230 V AC, 50 Hz ~ | 230 V AC, 50 Hz ~ |
| Power consumption: | max. 500 W | max. 1000 W | 2000 W |
| Socket: | GY-9.5 | GX-9.5 | |
| Lamp: | max. 500W | 650 to 1000 W | |
| Dimensions (LxWxH): | 310 x 230 x 330 mm | 380 x 270 x 340 mm | 450 x 320 x 400 mm |
| Weight: | 4 kg | 4.5 kg | 8 kg |



DMX WW CW DAYLIGHT

EUROLITE LED Theatre 36x3W CW/WW

Professional LED theatre spot with barn doors and color filter frame

- Equipped with 36 x 3 W LED: 18 x warm white, 18 x cold white
- Color temperature steplessly adjustable between 3000 K and 7000 K
- Dimmer
- Impressive light output
- Silent fan

No. 41602000

Technical specifications:

| | |
|-----------------------|-----------------------|
| Power supply: | 230 V AC, 50 Hz ~ |
| Power consumption: | 130 W |
| Beam angle: | approx. 20° |
| LED-type: | 3 W |
| Number of LEDs: | 36 (18 x WW, 18 x CW) |
| DMX control channels: | 5 |
| DMX512 connection: | 3-pin XLR |
| Dimensions (LxWxH): | 180 x 305 x 340 mm |
| Weight: | 6 kg |



DMX COB WW

EUROLITE LED Profile 100W WW

Professional stage spotlight

- Ideal for theatres, stages
- High-quality housing for high stability
- Locking possibility at the mounting bracket
- Control board with LC display and three operating buttons

No. 40001990

Technical specifications:

| | |
|-------------------------|-----------------------|
| Power supply: | 90-240 V AC, 50/60 Hz |
| Power consumption: | 120 W |
| Number of DMX channels: | 2 |
| DMX-512 connection: | 3-pin XLR |
| LED type: | COB 100 W |
| Number of LEDs: | 1 |
| Dimensions (LxWxH): | 590 x 260 x 320 mm |
| Weight: | 9 kg |

EUROLITE Iris for LED Profile 100W WW


No. 40001995



EUROLITE Profile Spot 650W 20-40°

Easy-to-handle profile spot

- Robust housing
- 4 shutter blades
- Focus manually adjustable from 20° to 40°

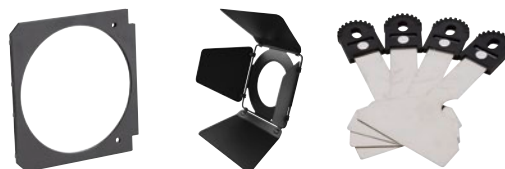

Technical specifications:

| | |
|--------------------|--------------------|
| Power supply: | 230 V AC, 50 Hz ~ |
| Power consumption: | 650 W |
| Dimensions: | 690 x 250 x 350 mm |
| Weight: | 10 kg |

| | |
|--------------------|--------------------|
| No. 40001961 | color filter frame |
| No. 40001962 | barn doors |
| No. 40001963 | barn doors |
| No. 40001964 | four-way blade set |