





## EUROLITE LED WF-10 Water effect

No. 51918543

- + Built-in effect wheel offers water effect with 5 colors plus white
- + Equipped with a white 10 W LED
- + DMX-controlled operation or stand-alone operation possible

DMX

HIGH  
POWER  
LED



- Built-in effect wheel offers a lovely water effect with 5 colors plus white
- Equipped with a white 10 W LED
- DMX-controlled operation or stand-alone operation with Master/Slave function
- Dimmer
- Manual focus
- Ready for connection with power cord and safety-plug
- Addressing via control panel with 4-digit LED display
- Perfect for use with EUROLITE KLS spotlight sets with IEC outputs
- DMX control via every standard DMX controller



### Technical specifications:

Power supply:	230 VAC, 50 Hz ~
Power consumption:	34 W
Number of DMX channels:	2
DMX512 connection:	3-pin XLR
LED type:	10 W
Number of LEDs:	1
LED beam angle:	35°
Dimensions:	220 x 265 x 190 mm
Weight:	2.6 kg

### Accessories:

EUROLITE TPC-10 Coupler, black	No. 59006858
Saving Safety bond 3x600 black	No. 58010252

## EUROLITE LED FF-15 Fire effect





No. 51918549

- + Creates effects like vivid flames
- + Rugged housing with mounting bracket
- + Operable in stand-alone mode or via DMX


NEW

DMX

HIGH  
POWER  
LED



- Creates effects like vivid flames
- Rugged housing with mounting bracket
- Locking possibility at the mounting bracket
- Easy operation
- Operable in stand-alone mode or via DMX
- DMX512 control possible via any commercial DMX controller (occupies max. 3 channels)
- 3 DMX channels selectable for numerous applications
- Comfortable addressing and setting via control panel with LED screen and three operating buttons
- Functions: 4 internal programs in auto mode; dimmer, motor-driven color wheel having 5 different dichroic color-filters with white and gobo rotating speed via DMX; Master/Slave
- When smoke is used, this effect becomes especially attractive
- Equipped with 1 x 15 W LED
- Beam angle approximately 30°
- Floor, ceiling or trussing installation possible
- Ready for connection via enclosed IEC power cord with safety-plug

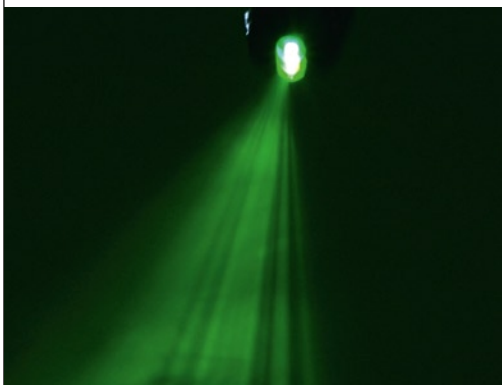

### Technical specifications:

Power supply:	230 VAC, 50 Hz
Power consumption:	22 W/42 VA
Number of channels:	3
DMX512 connection:	3-pin XLR
LED-type:	15 W
Number of LEDs:	1
Beam angle:	30°
Dimensions (LxWxH):	220 x 170 x 215 mm
Weight:	2.4 kg