



EUROLITE TH clamp

- Hook for installing projectors, lighting effects etc. via a truss system
- For truss systems with a tube diameter of 16, 25, 40, 50 mm

No. 58000385.....	TH-16S, black
No. 58000390.....	TH-16, silver
No. 58000450.....	TH-25, silver
No. 58000451.....	TH-25S, black
No. 58000705.....	TH-25, silver
No. 58000570.....	TH-40, silver
No. 58000571.....	TH-40S, black
No. 58000650.....	TH-50, silver
No. 58000651.....	TH-50S, black
No. 58000640.....	TH-51, silver
No. 58000641.....	TH-51S, black
No. 58000642.....	TH-52, silver
No. 58000643.....	TH-52S, black
No. 58000720.....	TH-90, silver
No. 58000721.....	TH-90S, black
No. 58000732.....	TH-100N, silver
No. 58000735.....	TH-150, silver
No. 58000736.....	TH-150S, black
No. 58000740.....	TH-200, silver
No. 58000741.....	TH-200S, black
No. 58000760.....	TH-250, silver
No. 58000751.....	TH-260, silver

Technical specifications:


Device:	TH-16	TH-25	TH-35	TH-40	TH-50	TH-51	TH-52	TH-90	TH-100N	TH-150	TH-200	TH-250	TH-260
Für Rohrdurchmesser:	16 mm	25 mm	35 mm	40 mm	50 mm	50 mm	50 mm	50 mm	50 mm	50 mm	50 mm	50 mm	50 mm
Max. load WLL (4-fold):	20 kg	20 kg	75 kg	30 kg	15 kg	24 kg	50 kg	100 kg	200 kg	200 kg	400 kg	250 kg	200 kg
Max. load BGV C1 (8-fold):	10 kg	10 kg	37,5 kg	15 kg	7,5 kg	12 kg	25 kg	50 kg	100 kg	100 kg	200 kg	125 kg	100 kg
Max. load BGV C1 (10-fold):	8 kg	8 kg	30 kg	12 kg	6 kg	10 kg	20 kg	40 kg	80 kg	80 kg	160 kg	100 kg	80 kg
Max. load BGV C1 (12-fold):	7 kg	7 kg	25 kg	10 kg	5 kg	8 kg	15 kg	35 kg	70 kg	70 kg	130 kg	83 kg	70 kg
Dimensions (LxWxH):	90 x 50 x 20 mm	90 x 95 x 20 mm	140 x 80 x 25 mm	95 x 60 x 30 mm	135 x 75 x 30 mm	135 x 75 x 30 mm	140 x 80 x 30 mm	175 x 120 x 35 mm	130 x 105 x 35 mm	220 x 140 x 35 mm	200 x 110 x 40 mm	190 x 100 x 30 mm	130 x 160 x 30 mm
Weight:	0,2 kg	0,2 kg	0,2 kg	0,4 kg	0,5 kg	0,5 kg	0,6 kg	0,4 kg	0,5 kg	0,4 kg	0,6 kg	0,5 kg	0,5 kg

EUROLITE TCH C-clamp

Professional C-hook

- C-hook for suspending crossbeams, Alu-Bars, aluminum tubes etc.
- For truss systems with a tube diameter of 50 mm

No. 58000655.....	TCH-50/20, silver
No. 58000656.....	TCH-50/20, black
No. 58000657.....	TCH-50/20H, silver
No. 58000660.....	TCH-50/30, silver
No. 58000665.....	TCH-50/65, silver
No. 58000690.....	TCH-50/28, silver
No. 58000691.....	TCH-50/28, black

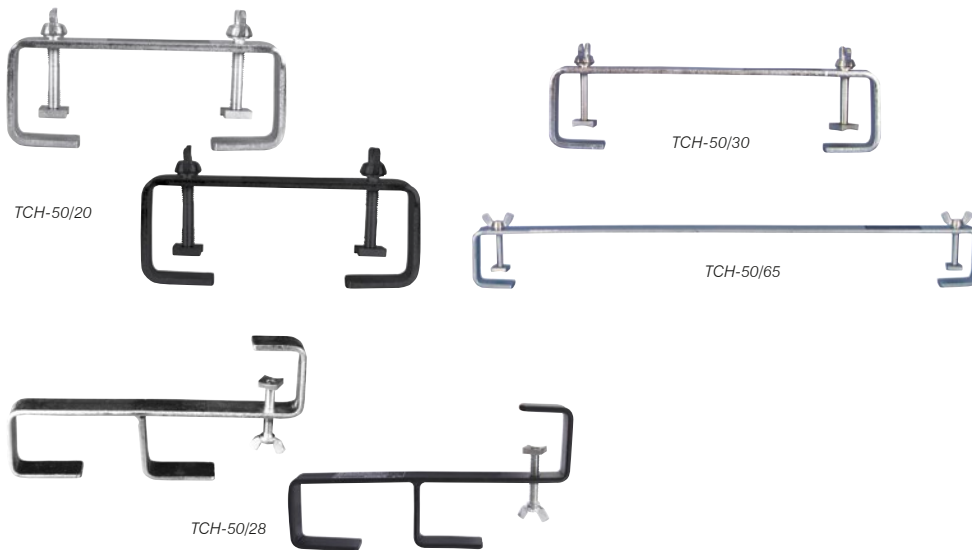

Technical specifications:

Device:	TCH-50/20	TCH-50/20H	TCH-50/30	TCH-50/65	TCH-50/28
Für Rohrdurchmesser:	50 mm	50 mm	50 mm	50 mm	50 mm
Max. load WLL (4-fold):	30 kg	100 kg	30 kg	30 kg	30 kg
Max. load BGV C1 (8-fold):	15 kg	50 kg	15 kg	15 kg	15 kg
Dimensions (LxWxH):	205 x 30 x 95 mm	205 x 40 x 95 mm	300 x 30 x 95 mm	650 x 30 x 95 mm	285 x 30 x 95 mm
Weight:	0.7 kg	1 kg	0.6 kg	1.2 kg	0.6 kg