


A (1:2)



| Posl | Semi-product, Norm | Alloy | pcs | Weight (kg) |
|------|-----------------------------|------------------------|-----|-------------|
| 1 | TR KR 50x4 - 410 EN 755-8 | EN AW-6082 T6-EN 573-3 | 4 | |
| 2 | TR KR 20x2 - 190 EN 755-8 | EN AW-6082 T6-EN 573-3 | 8 | |
| 3 | TR KR 20x2 - 357,8 EN 755-8 | EN AW-6082 T6-EN 573-3 | 4 | |
| 4 | TR KR 50x10 - 60 EN 755-8 | EN AW-6082 T6-EN 573-3 | 8 | |

Accuracy ISO2768-mk
Toleration ISO 8015

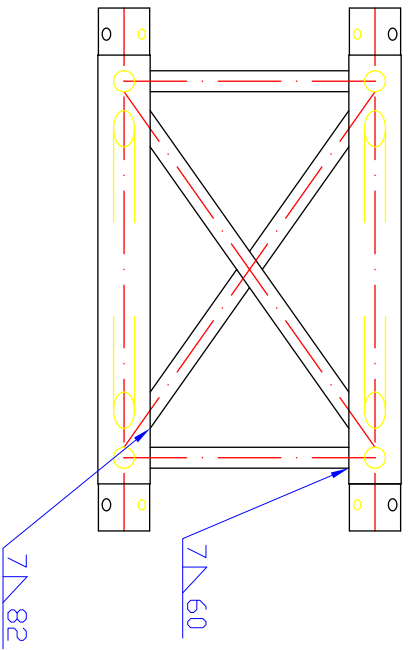

Maßstab 1:5 5,4

TQTR 500

| Zust. | Änderung | Datum | Name | TAF |
|-------|----------|-------|------|-----|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

| Datum | Name | Bearb. | Gepr. | Norm. |
|----------|-----------------|--------|-------|-------|
| 3.8.2005 | Ing. Zerutinsky | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

| Datum | Name | Bearb. | Gepr. | Norm. |
|-------|------|--------|-------|-------|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

TQTR 500 - 1

Batt

Bl.