


80710201-204 OMNITRONIC CS-2.5 Deckeneinbauls.rund

2,5" Full Range-Lautsprecher

- Einwege-System
- 100 V Trafo mit 3/6 W Lautstärke-Presets
- Für Beschallungsanlagen in Verkaufsräumen, Schulen, Hotels etc.

Eingangsspannung:	100 V
Lautsprecher:	2,5"
Nennleistung Transformator:	3/6 W RMS
Nennleistung Lautsprecher:	3/6 W RMS
Empfindlichkeit:	87 dB, ±3 dB (1 W, 1 m)
Max. Schalldruck:	91 dB (1 m)
Impedanz:	8 Ohm
Frequenzbereich:	120 Hz - 20 kHz
Maße (H x B x T):	100 x 100 x 70 mm
Montageausschnitt:	80 mm ø
Gewicht:	0,4 kg

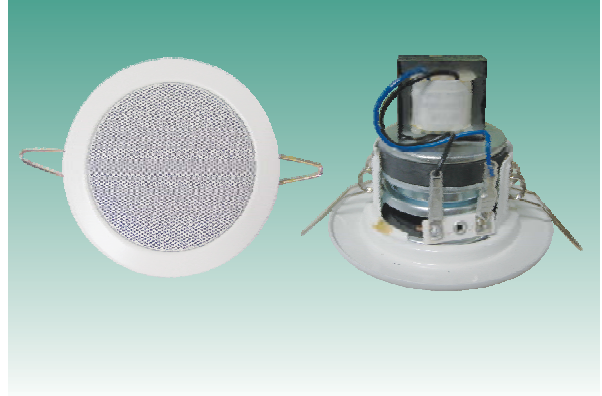

80710201-204 OMNITRONIC CS-2.5 ceiling speak.round

2.5" full range loudspeaker

- One way system
- 100 V transformer with 3/6 W volume-presets
- For amplifying systems in sales areas, schools, hotels etc.

Input Voltage:	100 V
Speakers:	2.5"
Rated power transformer:	3/6 W RMS
Rated power speaker:	3/6 W RMS
Sensitivity (1 W/m):	87 dB, ±3 dB
Max. SPL (1 m):	91 dB
Impedance:	8 Ohms
Frequency range:	120 Hz - 20 kHz
Dimensions (H x W x D):	100 x 100 x 70 mm
Mounting cutout:	80 mm ø
Weight:	0.4 kg

