



### 80710222 OMNITRONIC CST-6 rund 2-Wege LS m.Transf.

- 6" Lautsprecher
- Zweiwege-System
- 100 V Trafo mit 1,25/2,5/5 W Lautstärke-Presets
- Für Beschallungsanlagen in Verkaufsräumen, Schulen, Hotels etc.

Eingangsspannung:	100 V
Lautsprecher:	6" + 0,5"
Nennleistung Transformator:	1,25/2,5/5 W RMS
Nennleistung Lautsprecher:	7,5/15/30 W RMS
Empfindlichkeit:	87 dB, $\pm 3$ dB (1 W, 1 m)
Max. Schalldruck:	99 dB (1 m)
Impedanz:	8 Ohm
Frequenzbereich:	90 Hz - 20 kHz
Maße (H x B x T):	230 x 230 x 90 mm
Montageausschnitt:	200 mm $\varnothing$
Gewicht:	1,6 kg

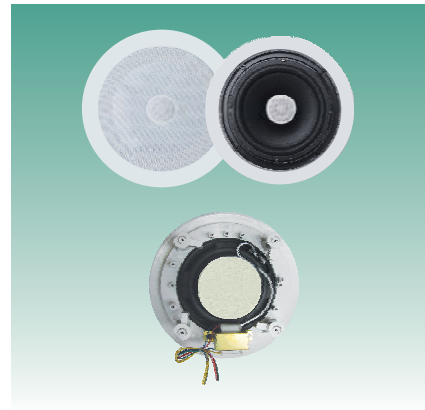

### 80710222 OMNITRONIC CST-6 round 2-way sp w.transf.

- 6" loudspeaker
- Two way system
- 100 V transformer with 1.25/2.5/5 W volume-presets
- For amplifying systems in sales areas, schools, hotels etc.

Input Voltage:	100 V
Speakers:	6" + 0.5"
Rated power transformer:	1.25/2.5/5 W RMS
Rated power speaker:	7,5/15/30 W RMS
Sensitivity (1 W/m):	87 dB, $\pm 3$ dB
Max. SPL (1 m):	99 dB
Impedance:	8 Ohms
Frequency range:	90 Hz - 20 kHz
Dimensions (H x W x D):	230 x 230 x 90 mm
Mounting cutout:	200 mm $\varnothing$
Weight:	1.6 kg

