


80710260 OMNITRONIC CSC-4 Deckenl. rund +Firedome

- 4" Full Range-Lautsprecher
- Einwege-System
- 100 V Trafo mit 3/6 W Lautstärke-Presets
- Safety-version mit Feuerschutz-Topf, Metall
- Für Beschallungsanlagen in Verkaufsräumen, Schulen, Hotels etc.

Eingangsspannung: 100 V
 Lautsprecher: 4"
 Nennleistung Transformator: 3/6 W RMS
 Nennleistung Lautsprecher: 3/6 W RMS
 Empfindlichkeit: 90 dB, ± 3 dB (1 W, 1 m)
 Max. Schalldruck: 94 dB (1 m)
 Impedanz: 8 Ohm
 Frequenzbereich: 150 Hz - 15 kHz
 Maße (H x B x T): 180 x 180 x 110 mm
 Montageausschnitt: 150 mm \varnothing
 Gewicht: 0,9 kg

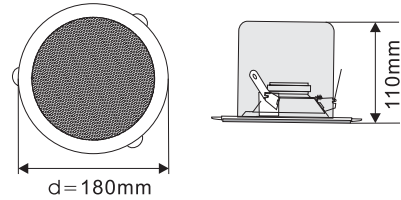

80710260 OMNITRONIC CSC-4 ceil.spk.round +Firedome

- 4" full range loudspeaker
- One way system
- 100 V transformer with 3/6 W volume-presets
- Safety-version with firedome, metal
- For amplifying systems in sales areas, schools, hotels etc.

Input Voltage: 100 V
 Speakers: 4"
 Rated power transformer: 3/6 W RMS
 Rated power speaker: 3/6 W RMS
 Sensitivity (1 W/m): 90 dB, ± 3 dB
 Max. SPL (1 m): 94 dB
 Impedance: 8 Ohms
 Frequency range: 150 Hz - 15 kHz
 Dimensions (H x W x D): 180 x 180 x 110 mm
 Mounting cutout: 150 mm \varnothing
 Weight: 0.9 kg

