

80710503 OMNITRONIC WC-2 ELA-LS zur Wandbefestigung






- ELA-Lautsprecher
- 100 V Trafo
- Durch hochwertiges Kunststoffgehäuse (ABS) schlag- u. kratzfest
- Für Beschallungsanlagen in Verkaufsräumen, Schulen, Hotels etc.

Eingangsspannung: 100 V
 Lautsprecher: 5,5"
 Nennleistung Transformator: 3/6 W RMS
 Nennleistung Lautsprecher: 3/6 W RMS
 Empfindlichkeit: 91 dB, ±3 dB (1 W, 1 m)
 Max. Schalldruck: 98 dB (1 m)
 Impedanz: 8 Ohm
 Frequenzbereich: 150 Hz - 15 kHz
 Maße (H x B x T): 312 x 210 x 85 mm
 Gewicht: 1,4 kg

80710503 OMNITRONIC WC-2 wall mounted pa-speaker


- ELA-loudspeaker
- 100 V transformer
- High quality, scratch-resistant housing (ABS)
- For amplifying systems in sales areas, schools, hotels etc.

Input Voltage: 100 V
 Speakers: 5.5"
 Rated power transformer: 3/6 W RMS
 Rated power speaker: 3/6 W RMS
 Sensitivity (1 W/m): 91 dB, ±3 dB
 Max. SPL (1 m): 98 dB
 Impedance: 8 Ohms
 Frequency range: 100 Hz - 18 kHz
 Dimensions (H x W x D): 312 x 210 x 85 mm
 Weight: 1,4 kg

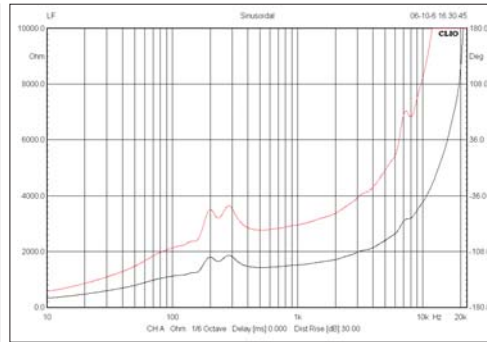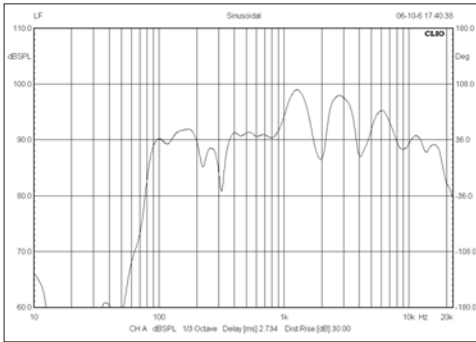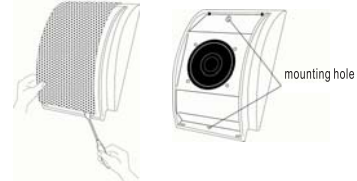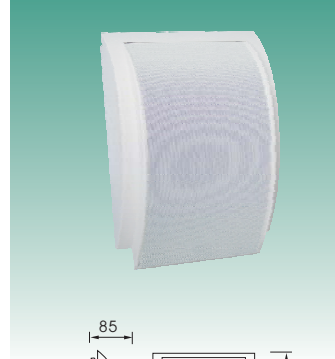


Horizontal:


Vertical:

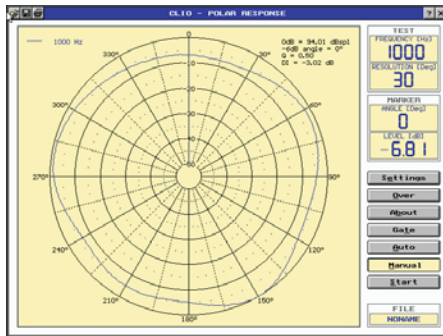


1000Hz H

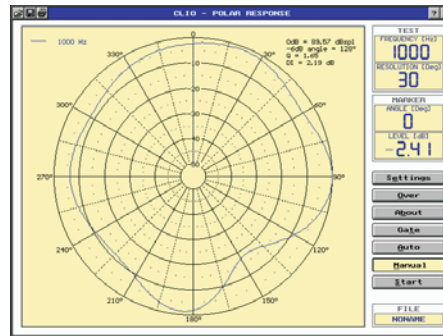


1000Hz

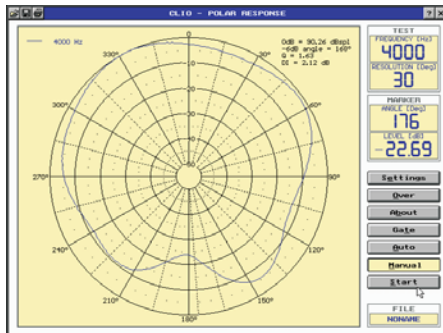


4000Hz

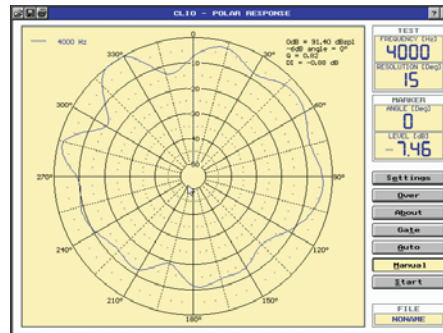

4000Hz

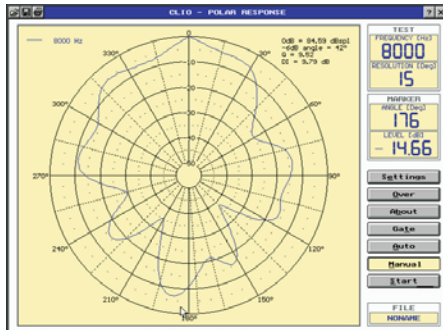

8000Hz

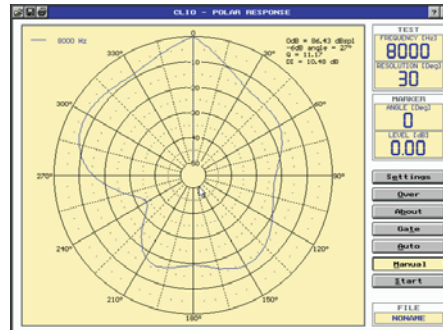

8000Hz