



GE
Lighting



76
kWh/1000h

D
energy class

PAR 30

OT*Q75PAR30 240V E27 10DEG GE BX1/15

40367

Product information

Halogen PAR lamps are a range of direct replacement for standard incandescent reflector lamps. They run on mains voltage, so you no longer need transformers or extra wiring to enjoy the crisp white light of halogen.


Application areas



Hospitality



Home

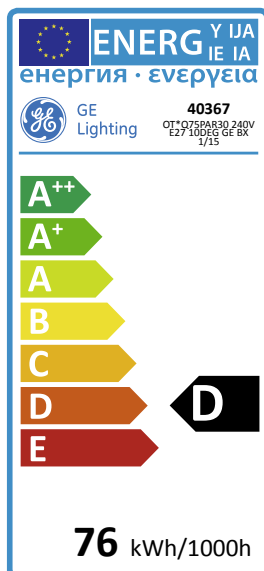

Product data

Cap/Base	E27
Bulb Shape	PAR
Bulb Diameter [mm]	97
Maximum Overall Length [mm]	88
Net weight per piece [g]	175
Gross weight per piece [g]	258
Brand	General Electric (GE)

Performance data

Colour Rendering Index (CRI) [Ra]	100
Nominal correlated colour temperature (CCT) [K]	2900
Nominal beam angle [°]	10
Rated beam angle [°]	10
Nominal center beam candlepower (CBCP) [cd]	6900
Rated peak intensity in [Cd]	6900
Rated Lumens [lm]	650
Energy efficiency class (EEC)	D
Rated Life [h]	2000
Nominal Lifetime [h]	2000
Weighted energy consumption [kWh/1000h]	75.48

Electrical data

Nominal power [W]	75
Rated power [W]	75.0
Nominal lamp power factor	1
Nominal lamp voltage [V]	240
Run-up time (sec)	Instant startup
Starting time (sec)	0.0 s
Number of switching cycles	8000
Coil type	CC-8
Dimming Capability	Yes

Logistic data

DUN Code	10043168403679
EAN Code	0043168403672
Pack Quantity	15
Layer quantity	60 EUR, 75 UK
Layer quantity EUR	60
Layer quantity UK	75
Pallet quantity EUR (PC)	360
Pallet quantity UK (PC)	450
Outer case size	525 x 340 x 175 (mm)
Product status	Available

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Halogen Lamps Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)