




GE  
Lighting

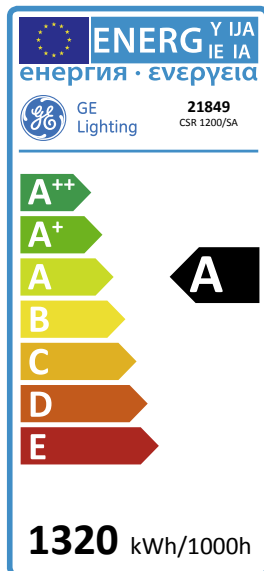

1320  
kWh/1000h

A  
energy class

83  
lumens/watt

## Discharge - Short Arc

CSR 1200/SA

# 21849

### Product information

Metal halide short arc lamps. The special chromised seal protection allows an increased maximum operating temperature at the base of 500° C for added reliability and consistent performance. RA 75+ -5600 – 7200 K -Dimmable with stable colour -High efficiency with excellent lumen maintenance.

### Application areas

Event and Tour



## Product data

Cap/Base	GY22
Bulb Shape	Tubular
Bulb Finish	Clear
Bulb Diameter [mm]	27
Maximum Overall Length [mm]	135
Light Center Length [mm]	59
Arc Gap	7
Net weight per piece [g]	390
Gross weight per piece [g]	440
Operating position	U - Universal
Brand	General Electric (GE)

## Performance data

Colour Code	758
Colour Rendering Index (CRI) [Ra]	75
Nominal correlated colour temperature (CCT) [K]	5800
Nominal lumens [lm]	100000
Energy efficiency class (EEC)	A
Nominal chromaticity coordinate X	0.326
Nominal chromaticity coordinate Y	0.33
Weighted energy consumption [kWh/1000h]	1320

## Electrical data

Nominal power [W]	1200
Nominal lamp voltage [V]	100
Lamp Current [A]	12
Dimming Capability	No
Ballast Required	Yes

## Logistic data

DUN Code	20043168218492
EAN Code	0043168218498
Pack Quantity	6
Inner pack type	BOX
Outer pack type	OUTER BOX
Layer quantity	72 UK
Layer quantity UK	72
Pallet quantity UK (PC)	360
Outer case size	280 x 190 x 305 (mm)
Product status	Available

## Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Entertainment Solution Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

## Disclaimer

Special Purpose Lamp, Not suited for household illumination