



MASTER MHN-SA

MASTER MHN-SA 1800W/956 (P)SFC 230V

Compact quartz metal halide lamps with double-pinch

Product data

General Information	
Cap-Base	(P)SFC [(P)SFC]
Bulb Shape	TD40 [TD 40mm]
Operating Position	P15 [Parallel +/-15D or Horizontal(HOR)]
Life To 5% Failures (Nom)	1300 h
Life To 10% Failures (Nom)	2000 h
Life To 20% Failures (Nom)	3200 h
Life To 50% Failures (Nom)	6100 h

Light Technical	
Color Code	956 [CCT of 5600K]
Luminous Flux (Rated) (Nom)	155000 lm
Color Designation	Daylight
Lumen Maintenance 1000 h (Nom)	95 %
Lumen Maintenance 2000 h (Nom)	91 %
Lumen Maintenance 5000 h (Nom)	76 %
Chromaticity Coordinate X (Nom)	330
Chromaticity Coordinate Y (Nom)	339
Correlated Color Temperature (Nom)	5600 K
Luminous Efficacy (rated) (Nom)	86 lm/W
Color Rendering Index (Nom)	86

Operating and Electrical	
Lamp supply voltage	230 V [230]
Power (Rated) (Nom)	1800.0 W

Lamp Current Run-Up (Max)	25 A
Lamp Current (EM) (Nom)	17.3 A
Ignition Supply Voltage (Min)	198 V
Voltage (Max)	130 V
Voltage (Min)	110 V
Voltage (Nom)	120 V

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Bulb Finish	Clear
Cap-Base Information	20-6

Approval and Application	
Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	92 mg
Energy Consumption kWh/1000 h	1980 kWh

Luminaire Design Requirements	
Bulb Temperature (Max)	980 °C
Pinch Temperature (Max)	300 °C


Product Data	
Full product code	871150020075400

MASTER MHN-SA

Order product name	MASTER MHN-SA 1800W/956 (P)SFC 230V
EAN/UPC - Product	8718291548263
Order code	928078415130
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1

Material Nr. (12NC)	928078415130
Net Weight (Piece)	0.219 kg
ILCOS Code	MN-1800-H-PSFc20=6-/H

Dimensional drawing

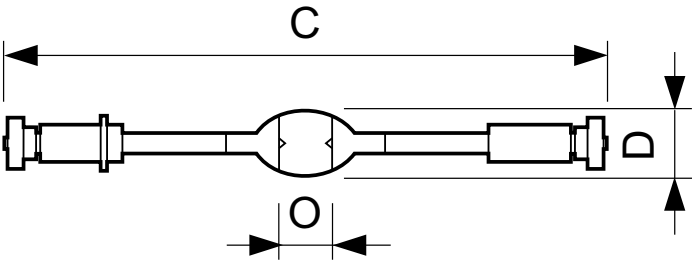

Product	D	O	C
MASTER MHN-SA 1800W/956 (P)SFC 230V	41 mm	25 mm	364 mm

MHN-SA 1800W/956 (P)SFC/20-6 230V

