

Product selected: BA 1200 DE S

BriteArc Double Ended lamps are metal halide light sources with excellent performance, specially designed for a wide variety of audio-visual applications. The BriteArc lamps are filled with mercury and rare earth elements to obtain a high efficacy and a stable colour. They can be re-struck at any time with a voltage peak from 25 to 55 kV.

Applications

- Show lighting
- Theatre
- Discotheque lighting
- Follow spots
- Effect lighting
- Studio lighting

Features

- High luminous efficacy
- Low infrared
- Colour stability
- Excellent lumen maintenance
- Physical ruggedness
- Hot restrike

Directions for use

- Burning position: universal for 575W and 1200W
- horizontal plus or minus 30 degrees for 2500W
- horizontal plus or minus 15 degrees for 4000W, 6000W and 12000W
- Only use in closed fixtures
- Can be operated on an electronic power supply or on a magnetic ballast


Product Attributes

Item description	BA 1200 DE S
Ordering Code	0023996
EAN code	5410288239965
Packing Quantity	10
Watt. (W)	1200
Volt. (V)	100
Cap	SFc10-4 pre-focused
Max. Over. Length (mm)	136
Diameter (mm)	22
Light output (lm)	95000
Current (A)	13.8
Average life (hours)	750
Repl. Time	1000
Colour Temp (K)	7200
CRI	2A
Arc Gap	7

Product Image



Line Drawing

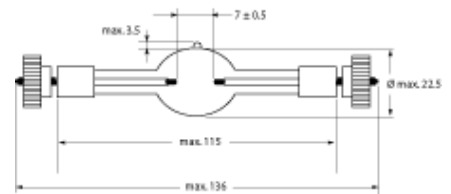

Lamp Cap

SFc10-4



Burning Position