




IP65

EUROLITE Outdoor Spot 250W WFL white A
250-Watt outdoor floodlight

- For architectural lighting or large stage backgrounds
- Unsymmetrical, i.e. more light upwards than downwards
- Aluminum die-cast housing
- For bright 250 W discharge lamp



No. 40000332

Technical specifications:


Power supply:	230 V AC, 50 Hz ~
Power consumption:	300 W
Protection grade:	IP 65
Dimensions (LxWxH):	395 x 150 x 585 mm
Weight:	12 kg



IP65

EUROLITE GKF-150S Outdoor Spot 150W RX7s bk
Static spot as outdoor floodlight (IP65)

- For architectural lighting or large stage backgrounds
- Symmetrical, i.e. the same radiation angle upwards and downwards
- For bright HQI discharge lamps with 150 Watts



No. 40000350

Technical specifications:


Power supply:	230 V AC, 50 Hz~
Power consumption:	200 W
Protection grade:	IP 65
Fitting lamp:	OMNILUX OQI-TS 150W RX7s
Dimensions (LxWxH):	370 x 210 x 365 mm
Weight:	6 kg



IP65

EUROLITE GKF-250S Outdoor Spot 250W E40 bk
Static spot as outdoor floodlight (IP65)


- For architectural lighting or large stage backgrounds
- Jet-proof construction for outdoor use
- For bright HQI discharge lamps with 250 Watts



No. 40000353

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	300 W
Protection grade:	IP 65
Fitting lamp:	OMNILUX OQI-T 250W E40
Dimensions (LxWxH):	470 x 220 x 430 mm
Weight:	7.5 kg

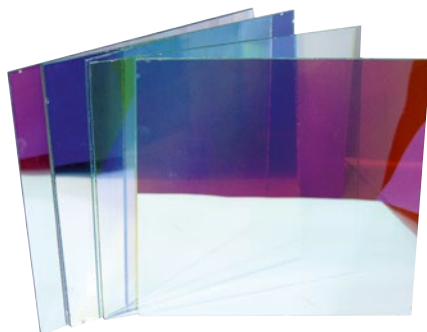

EUROLITE Dichro-filter 195x191mm

- No. 94304100.....red
- No. 94304110.....magenta
- No. 94304120.....orange
- No. 94304130.....light yellow
- No. 94304140.....golden yellow
- No. 94304160.....blue
- No. 94304180.....green
- No. 94304200.....violet

EUROLITE Dichro-filter 258x185x3mm

- No. 94304900.....red
- No. 94304910.....magenta
- No. 94304920.....orange
- No. 94304930.....light yellow
- No. 94304960.....blue
- No. 94304980.....green