eurolite®

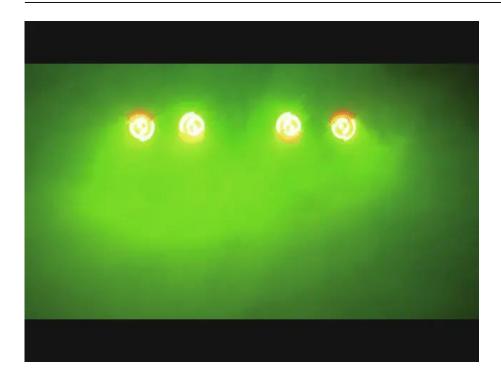## EUROLITE LED PAR-set ECO w/ stand

The article is no longer in our assortment.

Features:

EUROLITE A1 Steel Lighting Stand

Low-priced steel-stand with crossbeam, max. load 14 kg, max. height 250 cm

- Stable lighting stand for mobile use
- The telescopic tube is additionally fixed with a safety pin
- Adjustable height
- TV spigot

EUROLITE LED PAR-56 RGB 10mm Short black

LED PAR-56 Profi Spot, short

- DMX512 control via regular DMX controller (occupies 5 channels)
- Sound-control via built-in microphone
- Color-change speed and strobe effect adjustable via DIP switches
- Locking possibility at the mounting bracket
- For illuminating e.g. mirror balls, entrance or counter areas or as basic illumination
- Perfect in public places, main halls, stages, lounges
- Multi-color color-changes
- Master/Slave function
- Advantages of LED technology: long life of the LEDs, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation
- Available in silver or in black
- Preprogrammed in Light´J

OMNITRONIC XLR Cable 3-pin 1.5m bk

Audio cable with 3-pin XLR connectors<p class='attributgroup'>Package contents

Logistic

- 1 x XLR cable

EUROLITE DMX LED Operator 1 controller

Compact DMX controller for easy application

- 5 control channels only suitable for special LED-spots (RGB and TCL)
- Select color mode for choosing single colors
- Internal programs
- Auto mode for running all programs
- Sound-control via built-in microphone
- Pause function
- Blackout function
- Control LEDs display current operating mode
- Program Select-fader for selecting the internal programs
- Speed-fader for adjusting the program-speed
- Strobe-effect with adjustable speed
- Designed for standing operation, optional installation is customer's choice
- Power supply via enclosed 12 V DC power unit
- Can transmit up to 5 DMX channels
- Control via DMX
- Desktop console housing

Technical specifications:

Weight:	14,44 kg
Legal specifications	
Special product:	Not designed for household room illumination
Intended use:	Show effect lighting

EUROLITE A1 Steel Lighting Stand

Maximum carrying capacity:	14 kg
Height:	Maximum: 250 cm
	Minimum: 120 cm
Attachment system:	TV spigot mini Ø 17mm
Type (general stands):	Light stand/manual
Color:	Black
Weight:	5,40 kg

EUROLITE LED PAR-56 RGB 10mm Short black

Power supply:	230 V AC, 50 Hz
Power consumption:	16,00 W
DMX channels:	5
Preprogrammed in:	Light´J
Dimensions:	Width: 24 cm
	Depth: 23,5 cm
	Height: 18,5 cm
Weight:	1,85 kg
LED number:	108

Beam angle:	25-30°
Light ouput intensity:	R 18 Lm; G 187.2 Lm; B 28.8 Lm
Dimensions:	240 x 235 x 185 mm
Legal specifications	
Special product:	Not designed for household room illumination
Intended use:	Show effect lighting

OMNITRONIC XLR Cable 3-pin 1.5m bk

Cable construction:	2 x 0,22 mm² microphone cable
Cable length:	1,5 m
Plug A:	1 x 3-pin XLR (M)
Plug B:	1 x 3-pin XLR (F)
Material:	Metal
Color:	Black
Dimensions:	Diameter: Ø 0,60 cm
Weight:	0,12 kg

EUROLITE DMX LED Operator 1 controller

Power consumption:	4,00 W
IP classification:	IP20
DMX channels:	Output 5
Control:	DMX
Housing color:	Black
Color:	Black
Housing design:	Desktop console housing
Dimensions:	Width: 22 cm Depth: 14,5 cm Height: 6,5 cm
Weight:	0,92 kg
Power supply:	230 V AC, 50 Hz,
	via 12 V DC, 300 mA power unit included in the delivery
Number of control channels:	5
Sound-control:	via built-in microphone
DMX512 output:	3-pin XLR connector
Dimensions (L x W x H):	220 x 145 x 65 mm