


OMNITRONIC GEQ-2310XL Equalizer 2x31-Band

2 x 31-band equalizer with XL faders

Art. No.: 10355536

GTIN: 4026397522808

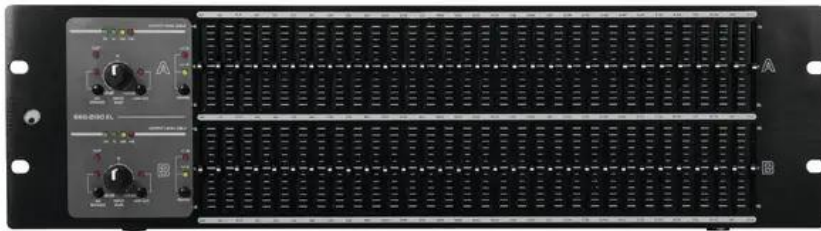

Features:

- 2-channel version, 2 x 31 frequency controls with 1/3 octave steps
- XL (50 mm) sliding frequency controls with center click
- EQ range switchable ± 6 dB to ± 15 dB
- Bessel low-cut filter (18 dB/octave 40 Hz)
- Separate input gain control per channel
- Bypass switch allows instant comparison of the original sound with the equalized sound
- 4-fold LED level meter with clip indicator
- Inputs and outputs via 6.3 mm jack sockets, XLR sockets and screw terminals
- Rack installation, 3 U
- (19") 48.3 cm rack installation 3 U

Logistic

EAN / GTIN: 4026397522808

Weight: 5,65 kg

Length: 0.54 m

Width: 0.28 m

Height: 0.24 m

Technical specifications:

Power supply:	230 V AC, 50 Hz
Power consumption:	20 W
Power connection:	Mains input via IEC connector (M) mounting version power supply cord with safety plug (provided)
Frequency range:	20 - 20000 Hz
S/N ratio:	>95 dB
THD:	<0.01 % at 1 kHz
Impedance:	Input: 40 kOhm , bal.

Input: 20 kOhm , unbal.
Output: 120 kOhm , bal.
Output: 60 kOhm , unbal.

Gain:	± 12 dB
Filter:	Low cut: 40 Hz
Control range:	±6dB, ±15dB, switchable
Crosstalk:	>80 dB
Connections:	Input: line via 2 x 3-pin XLR Input: line via 2 x 6.3 mm plug (unbal.) Input: line via screw terminal Output: line via 2 x 3-pin XLR Output: line via 2 x 6.3 mm plug (unbal.) Output: line via screw terminal
Equalizer:	Master: 2 x graphic equalizer 31-band Centre frequency: ISO standard, 1/3 octave (terzband), 20/25/31.5/40/50/63/80/100/125/160/200/250/315/400/500/ 630/800 Hz, 1/1.25/1.6/2/2.5/3.15/4/5/6.3/8/10/12.5/16/20 kHz
Max. level:	Input: +21 dBu Output: +24 dBu, bal. Output: +21 dBu, unbal.
Housing design:	(19") 48.3 cm rack installation 3 U
Dimensions:	Width: 48.3 cm Depth: 22.3 cm Height: 13.35 cm
Weight:	4.85 kg

Scope of delivery:
