


CELTO ACS218 Subwoofer Active

2 x 18" active subwoofer with DSP and 3000 W for the ACS10 line array system

Art. No.: 11043716

GTIN:

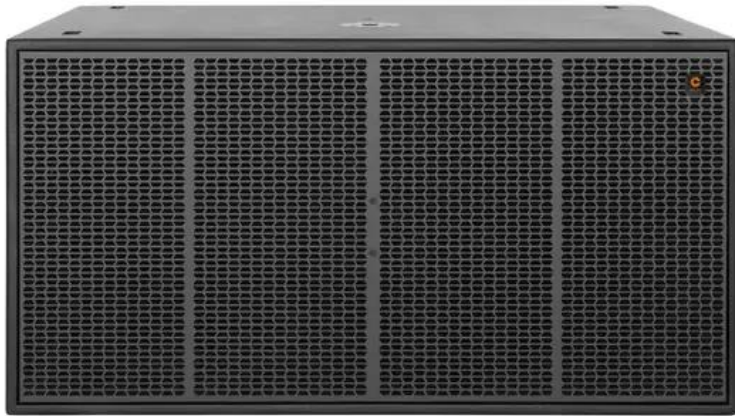

Description:

ACS 218 is a high-performance, 2x18" 3000W self-powered subwoofer engineered to deliver deep and accurate low-frequency reproduction well below 40Hz.

Designed as a companion for the ACS10 line source, it provides powerful low-end extension with advanced onboard amplification and DSP control.

Features:

- Clean and deep reproduction
- Premium custom made driver
- Heavy braced cabinet for vibration free dynamic response
- Rubberized Polyurea coating
- Wheels optional
- 8 x rubber feet
- integrated amplifier module**
- Digital signal processor
- DSP presets: FLAT; KICK; DEEP
- The device is cooled by temperature-controlled fan
- Monochrome LCD display
- For further information about this product, please refer to the Data Sheet under "Downloads"

Logistic

Technical specifications:

Power:

Rated: 3000W

| | |
|-----------------------|---|
| Frequency range: | 30 - 95 Hz |
| Max. SPL: | 139 dB |
| Dispersion angle: | Omnidirectional |
| Impedance: | 4 ohms speaker |
| Attachment system: | 2x M20 thread |
| Speaker: | 2 x woofer 18" with ferrit magnet Basket material: aluminum Voice coil woofer in/out wound 4" Conematerial: weatherproof Cardboard/paper |
| Type of speaker: | Subwoofer |
| Type of construction: | Vented |
| Transport aid: | Wheels optional 8 x rubber feet |
| Material: | Birch multiplex |
| Color: | Black, rubberized Polyurea coating, painted |
| Dimensions: | Width: 110 cm Depth: 74 cm Height: 58 cm |
| Weight: | 83.00 kg |
| Power supply: | 100-240 V AC, 50/60 Hz |
| Power consumption: | 1500 W |
| Protection class: | Protection class I |
| Output power: | Max. 6000 W 3000 W RMS |
| Power connection: | Mains input via PowerCON (blue), mounting version power supply cord with safety plug included |
| Power output: | PowerCON (gray), mounting version |
| DSP: | Digital signal processor |
| DSP presets: | FLAT; KICK; DEEP |
| Cooling: | 2 x temperature-controlled fan |
| Circuitry: | Class D |
| Display type: | Monochrome LCD display |
| Control elements: | Power switch, DSP preset switch |
| Controls: | Overheat; short-circuit; DC voltage; limiter |
| Status LED: | Power, signal, limit, protect |
| Connections: | Input: mono via 3-pin XLR (F) mounting version USB A (F) mounting version Link: mono via 3-pin XLR (M) mounting version |
| Cable construction: | 3 x 1.5 mm ² H05VV-F |
| Cable length: | 2 m detachable |

Scope of delivery:

1 x bass
1 x power cord