


FUTURELIGHT SVS-18.75 LED display 60x60

LED video display for outdoor use

Art. No.: 51843230

GTIN: 4026397465372

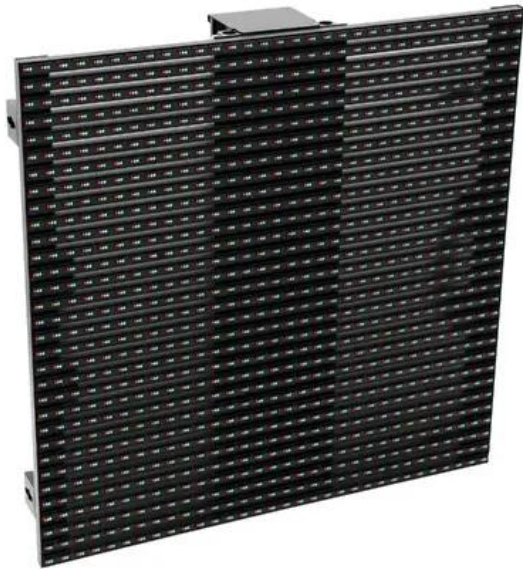

The article is no longer in our assortment.

Features:

- Modular LED video display for outdoor use, IP63
- Extra bright and colorful projection of videos, animations and graphics
- Ideal for rental companies, stage/fair construction and fixed installation
- Super-light and durable aluminum construction
- Seamless, modular display concept allows the build-up of large areas
- 18.75 mm pixel pitch
- 1024 pixels (32 x 32)
- Supports full HD 1080p
- Signal processing via onboard receiver card
- Control via optional video processor or PC software
- Ethernet-based signal distribution
- Truss support bar, signal and power cables optional

Logistic

EAN / GTIN: 4026397465372

Weight: 16,20 kg

Length: 0.71 m

Width: 0.21 m

Heigh: 0.72 m

Technical specifications:

Power supply: 100-240 V AC, 50/60 Hz

Power consumption: 160,00 W

IP classification: IP63

Dimensions: Width: 60 cm  
Height: 60 cm

Resolution (W x H): 32 x 32 pixels

Pixel pitch: 18.75 mm

Pixel density:	2844/m²
Pixel configuration:	DIP346
Signal connection:	DVI/RJ45
Display mode:	progressive scan
Brightness:	5000 cd/m² (nits)
Viewing angle:	110° horizontally
	45° vertically
Data refresh rate:	>2400 Hz
Contrast level:	>8192
Grey scale:	16 bits
Number of displays:	max. 1280 per sending card
	up to 1280 x 1024 pixels
Protection grade:	IP63
Operating temperature:	-10 to 45 °C
Humidity:	10 to 95 %
Dimensions:	600 x 600 mm
Weight:	13 kg
Legal specifications	
Special product:	Not designed for household room illumination
Intended use:	Show effect lighting