EUROLITE LED PR-100/32 Pixel DMX rail bk

DMX controlled pixel tube with RGB color mixing

Art. No.: 51928608

GTIN: 4026397684544

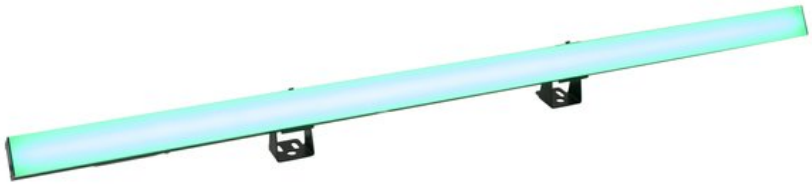

List price: 236.81 €

incl. 19% VAT.

Features:

- DMX and power terminals intelligently designed for easy wiring
- Front cover: black
- 96 powerful LEDs SMD 5050 3in1 TCL RGB (homogenous color mix)
32 segments controlled separately
- Color blend stepless; color change adjustable; colors preset; Dimmer electronic
- 12 integrated show programs
- Direct color selection for 17 preset colors
- The device is cooled by passive convection cooling
- Control via stand-alone; DMX; Sound to light via Microphone
- With a beam angle of 120°
- With Mounting bracket
- 4 digit 7-segment LED display
- Preprogrammed in Light Captain
- Silent operation
- Mains input and output for power linking up to 8 units
- For application areas such as: Clubs/dancing school; Trade fair and shop fitting; Stage; restaurants, bars and hotels
- Application possibility: Suspended; Wall mounting

  Package contents
- 1 x light effect, 1 x user manual, 1 x power cord

Logistic

EAN / GTIN: 4026397684544

Weight: 2,55 kg

Length: 1.04 m

Width: 0.10 m

Heigth: 0.20 m

Technical specifications:

Power supply:	100-240 V AC, 50/60 Hz

Eurolite®, Futurelight®, PSSO®, Roadinger®, Alutruss®, Europalms® and Dimavery® are trademarks of Steinigke Showtechnic GmbH, Andreas-Bauer-Straße 5, DE-97297 Waldbüttelbrunn
All rights reserved. Subject to change without notice. Errors and omissions excepted.Illustration only. Actual item may differ from photo.

Power consumption:	30 W
IP classification:	IP20
Protection class:	Protection class I
Power connection:	Mains input via P-Con (blue), mounting version power supply cord with safety plug (provided)
Power output:	1 x P-Con (gray), mounting version
Lamp type:	LED lamp
LED:	96 x SMD 5050 3in1 TCL RGB (homogenous color mix)
Flash rate:	0 - 20 Hz
DMX channels:	3; 5; 8; 48; 96
DMX input:	3-pin XLR (M) mounting version
DMX output:	3-pin XLR (F) mounting version
Cooling:	Passive convection cooling
Control:	Stand-alone; DMX; Sound to light via Microphone
Preprogrammed in:	Light Captain
Beam angle:	120°
Beam angle (1/2 peak):	120°
Housing color:	Black
Attachment system:	Mounting bracket
Display type:	4 digit 7-segment LED display
Dimensions:	Length: 99,9 cm Width: 5,95 cm Height: 13,2 cm
Weight:	2,01 kg
Noise classification:	Class 0 (no noise at all)
Legal specifications	
Special product:	Not designed for household room illumination
Intended use:	Show effect lighting

Eurolite®, Futurelight®, PSSO®, Roadinger®, Alutruss®, Europalms® and Dimavery® are trademarks of Steinigke Showtechnic GmbH, Andreas-Bauer-Straße 5, DE-97297 Waldbüttelbrunn
All rights reserved. Subject to change without notice. Errors and omissions excepted.Illustration only. Actual item may differ from photo.