


EUROLITE LED BAR-252 RGBA 10mm 20°

Versatile LED-RGBA color changer

Art. No.: 51930418

GTIN: 4026397397031

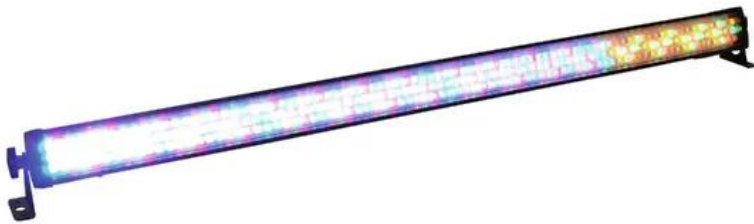

The article is no longer in our assortment.

Features:

- Operable in stand-alone mode or via DMX
- DMX512 control possible via any commercial DMX controller (occupies max.19 channels)
- 4, 6 or 19 DMX channels selectable for numerous applications
- Sound-control via built-in microphone
- Comfortable addressing and setting via control panel with LCD display and four operating buttons
- Functions: Static colors, RGBA color blend, internal programs, dimmer and strobe settings via DMX, Master/Slave
- Equipped with 252 x 10 mm LED
- Locking possibility at the mounting bracket
- Ready for connection with power cord and safety plug
- Available in 2 LED beam angles: 20° or 40°
- Advantages of high-power LED technology: extreme light output, long life, low power consumption, defacto maintenance free with brilliant light radiation
- Strobe effect
- Control via stand-alone; DMX
- Preprogrammed in Light´J; LED PC-Control 512
- With a beam angle of 20°

Logistic

EAN / GTIN: 4026397397031

Weight: 3,05 kg

Length: 1.08 m

Width: 0.12 m

Height: 0.13 m

Technical specifications:

Power supply: 230 V AC, 50 Hz

Power consumption: 24,00 W

IP classification: IP20

| | |
|-------------------------|-------------------------------------------------|
| Lamp type: | LED lamp |
| DMX channels: | 6; 4 |
| Control: | Stand-alone; DMX |
| Preprogrammed in: | Light'J; LED PC-Control 512 |
| Beam angle: | 20° |
| Beam angle (1/2 peak): | 20° |
| Housing color: | Black |
| Dimensions: | Length: 108 cm Depth: 6,5 cm Height: 9 cm |
| Weight: | 2,65 kg |
| DMX channels: | max. 19: 4 / 6 / 19 |
| DMX connection: | 3-pin XLR |
| Sound-control: | via built-in microphone |
| LED type: | 10 mm |
| LED number: | 252 |
| Beam angle: | 20° |
| Dimensions (L x W x H): | 1075 x 65 x 90 mm |
| Legal specifications | |
| Special product: | Not designed for household room illumination |
| Intended use: | Show effect lighting |