


EUROLITE LED PIX-144 RGB Bar

Bar (100 cm) with 144 wide beam SMD LEDs (RGB), 8 segments

Art. No.: 51930439 GTIN: 4026397618037

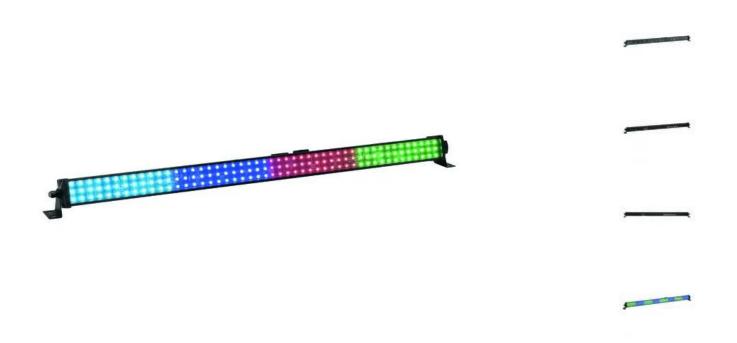

List price: 106.98 €

incl. 19% VAT.

Features:

- 144 powerful LEDs SMD 5050 3in1 TCL RGB (homogenous color mix)
8 segments controlled separately
- Dimmer electronic; color blend stepless; color change adjustable; colors preset
- Strobe effect
- The device is cooled by passive convection cooling
- Control via DMX; sound to light via microphone
- Flicker-free
- With mounting bracket
- 4 digit 7-segment LED display
- Silent operation
- Preprogrammed in Light'J; LED PC-Control 512; Light Captain; Colorchief
- Mains input and output for power linking up to 8 units
- For application areas such as: Clubs/dancing school; party room; restaurants, bars and hotels; mobile djs / entertainer
- Application possibility: Suspended; wall mounting

knurled screw

- M8 thread

Package contents

- 1 x light effect, 1 x power cord, 2 x mounting bracket, 2 x knurled screw, 2 x washer, 1 x user manual

Technical specifications:

Power supply:

100-240 V AC, 50/60 Hz

Logistic

EAN / GTIN: 4026397618037

Weight: 1,86 kg Length: 1.05 m Width: 0.12 m Heigth: 0.11 m

| Protection class: Protection class Protection | Power consumption: | 25 W |
|--|--------------------------|--|
| Power connection: Mains input via IEC connector (M) mounting version power supply cord with safety plug (provided) Power output: 1 x IEC connector (F) mounting version 5 x 20 mm, T 1 A fuse replaceable Lamp type: LED lamp LED type: 144 x SMD 5050 3in1 TCL RGB (homogenous color mix) Fliash rate: 0 - 20 Hz DMX channels: 3; 5; 6; 12; 24; 48 DMX input: 3-pin XLR (M) mounting version DMX output: 3-pin XLR (F) mounting version Cooling: Passive convection cooling Control: DMX: sound to light via microphone Light'i, LED PC-Control 512; Light Captain; Colorchief Projection: Flicker-free Housing color: Black Attachment system: 2x mounting bracket Display type: 4 digit 7-segment LED display Material: Aluminum casting Dimensions: Length: 102 cm Depth: 6,5 cm Height: 8 cm Weight: 1,54 kg Noise classification: Clable construction: 3 x 0,75 mm² H05VV-F Cable length: Approx. 1,2 m Mounting bracket Diameter mounting holes: 1 x Ø11mm; 2 x Ø8mm; 1 x Ø8,5mm Material: Metal, 2 mm Knurled screw Thread: M8 thread x 16 mm Washer Material: Rubber Dimensions: Legal specifications Special product: Not designed for household room illumination | IP classification: | IP20 |
| version power supply cord with safety plug (provided) Power output: 1 x IEC connector (F) mounting version Fuse: 5 x 20 mm, T 1 A fuse replaceable LED lamp LED type: 144 x SMD 5050 3in1 TCL RGB (homogenous color mix) Flash rate: 0 - 20 Hz DMX channels: 3; 5; 6; 12; 24; 48 DMX input: 3-pin XLR (M) mounting version DMX output: 3-pin XLR (M) mounting version Cooling: Passive convection cooling Control: DMX; sound to light via microphone Preprogrammed in: Light'; LED PC-Control 512; Light Captain; Colorchief Projection: Flicker-free Housing color: Black Attachment system: 2x mounting bracket Display type: 4 digit 7-segment LED display Material: Aluminum casting Dimensions: Length: 102 cm | Protection class: | Protection class I |
| Fuse: 5 x 20 mm, T 1 A fuse replaceable Lamp type: LED lamp LED type: 144 x SMD 5050 3in1 TCL RGB (homogenous color mix) Flash rate: 0 - 20 Hz DMX channels: 3, 5; 6; 12; 24; 48 DMX input: 3-pin XLR (M) mounting version DMX output: 3-pin XLR (F) mounting version Cooling: Passive convection cooling Control: DMX; sound to light via microphone Preprogrammed in: Light 3; LED PC-Control 512; Light Captain; Colorchief Projection: Flicker-free Housing color: Black Attachment system: 2x mounting bracket Display type: 4 digit 7-segment LED display Material: Aluminum casting Dimensions: Length: 102 cm Depth: 6,5 cm Height: 8 cm Weight: 1,54 kg Noise classification: Class 0 (no noise at all) Power cord Cable construction: 3 x 0,75 mm² H05VV-F Cable length: Approx. 1,2 m Mounting bracket Diameter mounting holes: 1 x Ø11mm; 2 x Ø8mm; 1 x Ø8,5mm | Power connection: | version power supply cord with safety plug |
| Lamp type: LED type: 144 x SMD 5050 3in1 TCL RGB (homogenous color mix) Flash rate: 0 - 20 Hz DMX channels: 3; 5; 6; 12; 24; 48 DMX input: 3-pin XLR (M) mounting version DMX output: 3-pin XLR (F) mounting version Cooling: Passive convection cooling Control: DMX; sound to light via microphone Preprogrammed in: Light 'J; LED PC-Control 512; Light Captain; Colorchief Projection: Flicker-free Housing color: Black Attachment system: 2x mounting bracket Display type: 4 digit 7-segment LED display Material: Aluminum casting Dimensions: Length: 102 cm Depth: 6,5 cm Height: 8 cm Weight: 1,54 kg Noise classification: Class 0 (no noise at all) Power cord Cable construction: 3 x 0,75 mm² H05VV-F Cable length: Approx. 1,2 m Mounting bracket Diameter mounting holes: 1 x Ø11mm; 2 x Ø8mm; 1 x Ø8,5mm Material: Metal, 2 mm Knutled screw Thread: M8 th | Power output: | 1 x IEC connector (F) mounting version |
| LED type: 144 x SMD 5050 3in1 TCL RGB (homogenous color mix) Flash rate: 0 - 20 Hz DMX channels: 3; 5; 6; 12; 24; 48 DMX input: 3-pin XLR (M) mounting version DMX output: 3-pin XLR (F) mounting version Cooling: Passive convection cooling Control: DMX; sound to light via microphone Preprogrammed in: Light J; LED PC-Control 512; Light Captain; Colorchief Projection: Flicker-free Housing color: Black Attachment system: 2x mounting bracket Display type: 4 digit 7-segment LED display Material: Aluminum casting Dimensions: Length: 102 cm Depth: 6,5 cm Depth: 6,5 cm Height: 8 cm Height: 8 cm Weight: 1,54 kg Noise classification: Class 0 (no noise at all) Power cord Class 0 (no noise at all) Cable length: Approx. 1,2 m Mounting bracket Diameter mounting holes: 1 x Ø11mm; 2 x Ø8mm; 1 x Ø8,5mm Material: Metal, 2 mm Knurled screw | Fuse: | 5 x 20 mm, T 1 A fuse replaceable |
| color mix) Flash rate: 0 - 20 Hz DMX channels: 3; 5; 6; 12; 24; 48 DMX input: 3-pin XLR (M) mounting version DMX output: 3-pin XLR (F) mounting version Cooling: Passive convection cooling Control: DMX; sound to light via microphone Preprogrammed in: Light'; LED PC-Control 512; Light Captain; Colorchief Projection: Flicker-free Housing color: Black Attachment system: 2x mounting bracket Display type: 4 digit 7-segment LED display Material: Aluminum casting Dimensions: Length: 102 cm Depth: 6,5 cm Height: 8 cm Weight: 1,54 kg Noise classification: Class 0 (no noise at all) Power cord Cable construction: 3 x 0,75 mm² H05VV-F Cable length: Approx. 1,2 m Mounting bracket Diameter mounting holes: 1 x Ø11mm; 2 x Ø8mm; 1 x Ø8,5mm Material: Metal, 2 mm Knurled screw Thread: M8 thread x 16 mm Washer Material: Rubber Dimensions: Height: 0,3 cm Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | Lamp type: | LED lamp |
| DMX channels: 3; 5; 6; 12; 24; 48 DMX input: 3-pin XLR (M) mounting version DMX output: 3-pin XLR (F) mounting version Cooling: Passive convection cooling Control: DMX; sound to light via microphone Preprogrammed in: Light'J; LED PC-Control 512; Light Captain; Colorchief Projection: Flicker-free Housing color: Black Attachment system: 2x mounting bracket Display type: 4 digit 7-segment LED display Material: Aluminum casting Dimensions: Length: 102 cm Depth: 6,5 cm Height: 8 cm Weight: 1,54 kg Noise classification: Class 0 (no noise at all) Power cord Cable construction: 3 x 0,75 mm² H05VV-F Cable length: Approx. 1,2 m Mounting bracket Diameter mounting holes: 1 x Ø11mm; 2 x Ø8mm; 1 x Ø8,5mm Material: Metal, 2 mm Knurled screw Thread: M8 thread x 16 mm Washer Material: Rubber Dimensions: Height: 0,3 cm Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | LED type: | |
| DMX input: 3-pin XLR (M) mounting version DMX output: 3-pin XLR (F) mounting version Cooling: Passive convection cooling Control: DMX; sound to light via microphone Preprogrammed in: Light'J; LED PC-Control 512; Light Captain; Colorchief Projection: Flicker-free Housing color: Black Attachment system: 2x mounting bracket Display type: 4 digit 7-segment LED display Material: Aluminum casting Dimensions: Length: 102 cm Depth: 6,5 cm Height: 8 cm Weight: 1,54 kg Noise classification: Class 0 (no noise at all) Power cord Cable construction: 3 x 0,75 mm² H05VV-F Cable length: Approx. 1,2 m Mounting bracket Diameter mounting holes: 1 x Ø11mm; 2 x Ø8mm; 1 x Ø8,5mm Material: Metal, 2 mm Knurled screw Thread: M8 thread x 16 mm Washer Material: Rubber Dimensions: Height: 0,3 cm Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | Flash rate: | 0 - 20 Hz |
| DMX output: Ooling: Passive convection cooling Preprogrammed in: DMX; sound to light via microphone Preprogrammed in: Light'J; LED PC-Control 512; Light Captain; Colorchief Projection: Flicker-free Housing color: Black Attachment system: 2x mounting bracket Display type: 4 digit 7-segment LED display Material: Aluminum casting Dimensions: Length: 102 cm Depth: 6,5 cm Height: 8 cm Weight: 1,54 kg Noise classification: Class 0 (no noise at all) Power cord Cable construction: 3 x 0,75 mm² H05VV-F Cable length: Approx. 1,2 m Mounting bracket Diameter mounting holes: 1 x Ø11mm; 2 x Ø8mm; 1 x Ø8,5mm Material: Metal, 2 mm Knurled screw Thread: M8 thread x 16 mm Washer Material: Rubber Dimensions: Height: 0,3 cm Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | DMX channels: | 3; 5; 6; 12; 24; 48 |
| Cooling: Passive convection cooling Control: DMX; sound to light via microphone Preprogrammed in: Light'J; LED PC-Control 512; Light Captain; Colorchief Projection: Flicker-free Housing color: Black Attachment system: 2x mounting bracket Display type: 4 digit 7-segment LED display Material: Aluminum casting Dimensions: Length: 102 cm Depth: 6,5 cm Height: 8 cm Weight: 1,54 kg Noise classification: Class 0 (no noise at all) Power cord Cable construction: 3 x 0,75 mm² H05VV-F Cable length: Approx. 1,2 m Mounting bracket Diameter mounting holes: 1 x Ø11mm; 2 x Ø8mm; 1 x Ø8,5mm Material: Metal, 2 mm Knurled screw Thread: M8 thread x 16 mm Washer Material: Rubber Dimensions: Height: 0,3 cm Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | DMX input: | 3-pin XLR (M) mounting version |
| Control: DMX; sound to light via microphone Preprogrammed in: Light'J; LED PC-Control 512; Light Captain; Colorchief Projection: Flicker-free Housing color: Black Attachment system: 2x mounting bracket Display type: 4 digit 7-segment LED display Material: Aluminum casting Dimensions: Length: 102 cm Depth: 6,5 cm Height: 8 cm Weight: 1,54 kg Noise classification: Class 0 (no noise at all) Power cord Cable construction: 3 x 0,75 mm² H05VV-F Cable length: Mounting bracket Diameter mounting holes: 1 x Ø11mm; 2 x Ø8mm; 1 x Ø8,5mm Material: Metal, 2 mm Knurled screw Thread: M8 thread x 16 mm Washer Material: Rubber Dimensions: Dimensions: Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | DMX output: | 3-pin XLR (F) mounting version |
| Preprogrammed in: Light'J; LED PC-Control 512; Light Captain; Colorchief Projection: Flicker-free Housing color: Black Attachment system: 2x mounting bracket Display type: 4 digit 7-segment LED display Material: Aluminum casting Dimensions: Length: 102 cm Depth: 6,5 cm Height: 8 cm Weight: 1,54 kg Noise classification: Class 0 (no noise at all) Power cord Cable construction: 3 x 0,75 mm² H05VV-F Cable length: Approx. 1,2 m Mounting bracket Diameter mounting holes: 1 x Ø11mm; 2 x Ø8mm; 1 x Ø8,5mm Material: Metal, 2 mm Knurled screw Thread: M8 thread x 16 mm Washer Material: Rubber Dimensions: Height: 0,3 cm Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | Cooling: | Passive convection cooling |
| Colorchief Projection: Flicker-free Housing color: Black Attachment system: 2x mounting bracket Display type: 4 digit 7-segment LED display Material: Aluminum casting Dimensions: Length: 102 cm | Control: | DMX; sound to light via microphone |
| Housing color: Attachment system: 2x mounting bracket Display type: 4 digit 7-segment LED display Material: Aluminum casting Dimensions: Length: 102 cm Depth: 6,5 cm Height: 8 cm Weight: 1,54 kg Noise classification: Class 0 (no noise at all) Power cord Cable construction: 3 x 0,75 mm² H05VV-F Cable length: Approx. 1,2 m Mounting bracket Diameter mounting holes: 1 x Ø11mm; 2 x Ø8mm; 1 x Ø8,5mm Material: Metal, 2 mm Knurled screw Thread: M8 thread x 16 mm Washer Material: Rubber Dimensions: Height: 0,3 cm Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | Preprogrammed in: | • |
| Attachment system: Display type: 4 digit 7-segment LED display Material: Aluminum casting Dimensions: Length: 102 cm Depth: 6,5 cm Height: 8 cm Weight: 1,54 kg Noise classification: Class 0 (no noise at all) Power cord Cable construction: 3 x 0,75 mm² H05VV-F Cable length: Approx. 1,2 m Mounting bracket Diameter mounting holes: 1 x Ø11mm; 2 x Ø8mm; 1 x Ø8,5mm Material: Metal, 2 mm Knurled screw Thread: M8 thread x 16 mm Washer Material: Rubber Dimensions: Height: 0,3 cm Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | Projection: | Flicker-free |
| Display type: 4 digit 7-segment LED display Material: Aluminum casting Dimensions: Length: 102 cm | Housing color: | Black |
| Material: Dimensions: Length: 102 cm Depth: 6,5 cm Height: 8 cm Weight: 1,54 kg Noise classification: Class 0 (no noise at all) Power cord Cable construction: 3 x 0,75 mm² H05VV-F Cable length: Approx. 1,2 m Mounting bracket Diameter mounting holes: 1 x Ø11mm; 2 x Ø8mm; 1 x Ø8,5mm Material: Metal, 2 mm Knurled screw Thread: M8 thread x 16 mm Washer Material: Rubber Dimensions: Height: 0,3 cm Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | Attachment system: | 2x mounting bracket |
| Dimensions: Length: 102 cm Depth: 6,5 cm Height: 8 cm Weight: 1,54 kg Noise classification: Class 0 (no noise at all) Power cord Cable construction: 3 x 0,75 mm² H05VV-F Cable length: Approx. 1,2 m Mounting bracket Diameter mounting holes: 1 x Ø11mm; 2 x Ø8mm; 1 x Ø8,5mm Material: Metal, 2 mm Knurled screw Thread: M8 thread x 16 mm Washer Material: Rubber Dimensions: Height: 0,3 cm Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | Display type: | 4 digit 7-segment LED display |
| Depth: 6,5 cm Height: 8 cm Weight: 1,54 kg Noise classification: Class 0 (no noise at all) Power cord Cable construction: 3 x 0,75 mm² H05VV-F Cable length: Approx. 1,2 m Mounting bracket Diameter mounting holes: 1 x Ø11mm; 2 x Ø8mm; 1 x Ø8,5mm Material: Metal, 2 mm Knurled screw Thread: M8 thread x 16 mm Washer Material: Rubber Dimensions: Height: 0,3 cm Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | Material: | Aluminum casting |
| Noise classification: Class 0 (no noise at all) Power cord Cable construction: 3 x 0,75 mm² H05VV-F Cable length: Approx. 1,2 m Mounting bracket Diameter mounting holes: 1 x Ø11mm; 2 x Ø8mm; 1 x Ø8,5mm Material: Metal, 2 mm Knurled screw Thread: M8 thread x 16 mm Washer Material: Rubber Dimensions: Height: 0,3 cm Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | Dimensions: | Depth: 6,5 cm |
| Power cord Cable construction: 3 x 0,75 mm² H05VV-F Cable length: Approx. 1,2 m Mounting bracket Diameter mounting holes: 1 x Ø11mm; 2 x Ø8mm; 1 x Ø8,5mm Material: Metal, 2 mm Knurled screw Thread: M8 thread x 16 mm Washer Material: Rubber Dimensions: Height: 0,3 cm Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | Weight: | 1,54 kg |
| Cable construction: 3 x 0,75 mm² H05VV-F Cable length: Approx. 1,2 m Mounting bracket Diameter mounting holes: 1 x Ø11mm; 2 x Ø8mm; 1 x Ø8,5mm Material: Metal, 2 mm Knurled screw Thread: M8 thread x 16 mm Washer Material: Rubber Dimensions: Height: 0,3 cm Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | Noise classification: | Class 0 (no noise at all) |
| Cable length: Mounting bracket Diameter mounting holes: 1 x Ø11mm; 2 x Ø8mm; 1 x Ø8,5mm Material: Metal, 2 mm Knurled screw Thread: M8 thread x 16 mm Washer Material: Rubber Dimensions: Height: 0,3 cm Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | Power cord | |
| Mounting bracket Diameter mounting holes: 1 x Ø11mm; 2 x Ø8mm; 1 x Ø8,5mm Material: Metal, 2 mm Knurled screw Thread: M8 thread x 16 mm Washer Material: Rubber Dimensions: Height: 0,3 cm Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | Cable construction: | 3 x 0,75 mm² H05VV-F |
| Diameter mounting holes: 1 x Ø11mm; 2 x Ø8mm; 1 x Ø8,5mm Material: Metal, 2 mm Knurled screw Thread: M8 thread x 16 mm Washer Material: Rubber Dimensions: Height: 0,3 cm Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | Cable length: | Approx. 1,2 m |
| Material: Metal, 2 mm Knurled screw Thread: M8 thread x 16 mm Washer Material: Rubber Dimensions: Height: 0,3 cm Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | Mounting bracket | |
| Knurled screw Thread: M8 thread x 16 mm Washer Material: Rubber Dimensions: Height: 0,3 cm Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | Diameter mounting holes: | 1 x Ø11mm; 2 x Ø8mm; 1 x Ø8,5mm |
| Thread: M8 thread x 16 mm Washer Material: Rubber Dimensions: Height: 0,3 cm Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | Material: | Metal, 2 mm |
| Washer Material: Rubber Dimensions: Height: 0,3 cm Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | Knurled screw | |
| Material: Rubber Dimensions: Height: 0,3 cm Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | Thread: | M8 thread x 16 mm |
| Dimensions: Height: 0,3 cm Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | Washer | |
| Diameter: Ø 2 cm Legal specifications Special product: Not designed for household room illumination | Material: | Rubber |
| Special product: Not designed for household room illumination | Dimensions: | - |
| | Legal specifications | |
| Intended use: Show effect lighting | Special product: | Not designed for household room illumination |
| | Intended use: | Show effect lighting |