


EUROLITE LSD-18.25 MK2 (H)1,17m (W)1,17m

LED soft displays

Art. No.: 80503264

GTIN: 4026397459821

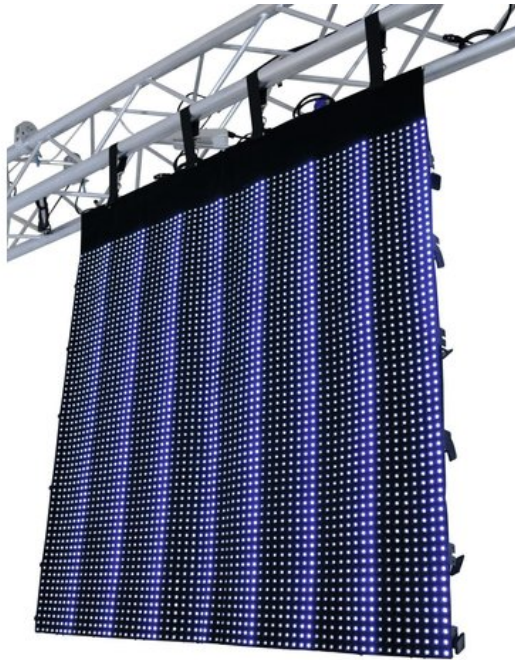

The article is no longer in our assortment.

Features:

- Flexible displays with tricolor RGB LEDs (type SMD 5050) for bright and colorful projection of videos and graphics
- Improved version with even brighter LEDs and new angled connectors
- Modular display concept allows the build-up of large areas, ideal for outdoor use with large viewing distances
- Bendable and foldable PVC material suitable for various shapes, e.g. columns, circles, angles
- Fast and uncomplicated installation, indoor and outdoor (IP44)
- Truss suspension via built-in belts
- Water-repellent and flame-resistant
- Low weight and small volume for convenient transport
- Easy maintenance - LEDs can be replaced without difficulty
- Controllable via optional network components and PC software
- All-in-one control system T9 (80503301): network interface and software LED Show T9 - ideal system for mobile use with notebooks with 1-gigabit NIC
- Control system LED studio: receiver interface (80503311), PCI sending card and software LED Studio (80503130)
- Recommended media software: MADRIX
- Switch-mode power supply for operation between 100 and 240 volts
- Power output for passing on the power supply
- Available in different sizes and pixel pitches
- Custom sizes available upon request
- 4096 powerful LEDs SMD 5050 3in1 TCL RGB (homogenous color mix)

Logistic

EAN / GTIN: 4026397459821

Weight: 19,20 kg

Length: 1.21 m

Width: 0.61 m

Height: 0.14 m

Bulky product

Technical specifications:

| | |
|------------------------|--|
| Power supply: | 100-240 V AC, 50/60 Hz |
| Power consumption: | 78,00 W |
| IP classification: | IP44 |
| LED: | 4096 x SMD 5050 3in1 TCL RGB (homogenous color mix) |
| Lamp life: | 100000 h |
| Dimensions: | Width: 1,17 m Height: 1,17 m |
| Weight: | 16,80 kg |
| Resolution (W x H): | 64 x 64 pixels |
| Pixel pitch: | 18.25 mm |
| Pixel density: | 3002/m² |
| Pixel configuration: | tricolor RGB LEDs, type SMD 5050 |
| Display port: | DVI/RJ45 |
| Display mode: | synchronous to video source |
| Drive mode: | 1/8 scan |
| Screen resolution: | max. 1280 x 1024 (LED Studio) max. 1024 x 896 (LED Show T9) |
| Brightness: | 3680 cd/m² (nits) |
| Viewing angle: | 110° |
| Frame rate: | 60 Hz |
| Data refresh rate: | 600 Hz |
| Colors: | 16.7 million (R 256, G 256, B 256) |
| Operating temperature: | -10 to 45 °C |
| Humidity: | 10 to 90 % |
| Legal specifications | |
| Special product: | Not designed for household room illumination |
| Intended use: | Show effect lighting |