


## PHILIPS MSR 2500HRSE 115V/2500W G-38 500h

HMI / MSR / HMP / OMI lamps

Art. No.: 89111015

GTIN: 08727900926040

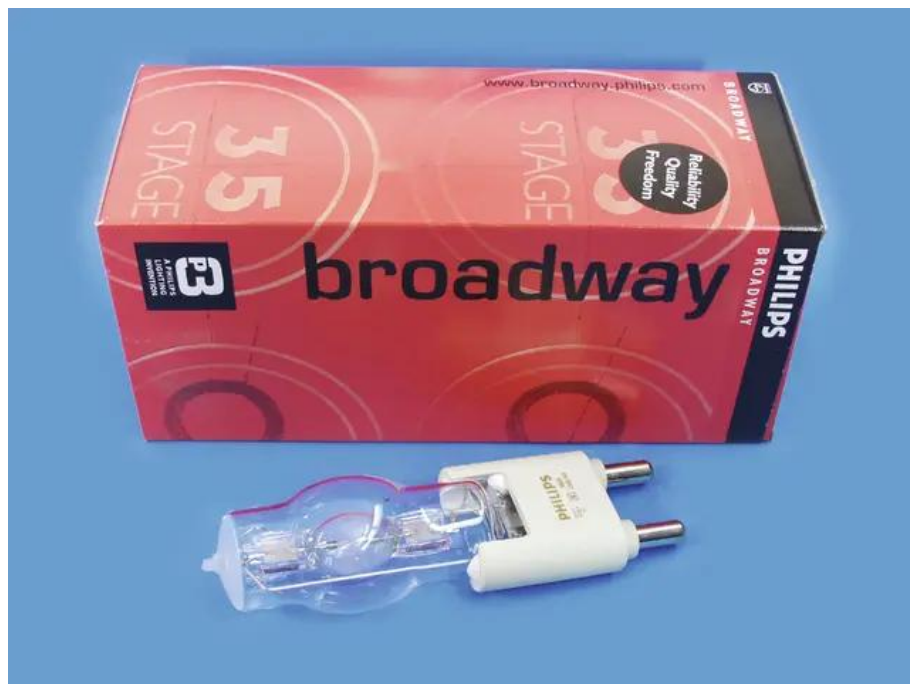

**The article is no longer in our assortment.**

### Description:

Basics:

GS=Gap Short (shortened electrode space)

DE=Double Ended (double-sided lamp with threaded pin)

SE=Single Ended (one-sided lamp)

PAR=Lamp built in a parabolic reflector

HMP=Due to their special filling and to their electrode system, HMP-lamps cannot only be "dimmed", but also be "boosted", i. e. be operated beyond their rated power. During this, the light technical characteristics, such as color temperature, color rendering index and light output are practically constant during "dimming" and "boosting".

### Features:

- Extremely high light output
- Best color rendering
- Light output three to four times higher in comparison to filament light
- Light is generated via an arc between two electrodes
- Spectrum similar to daylight (between 4500 and 6500 K)
- Constant color temperature and color rendering behaviour over the whole lamp life
- Photographic industry
- Halogen metal evaporation lamps provide a spectrum composed of a lot of lines, in contrast to temperature radiators, as halogen-incandescent lamps
- Dimmable
- Hot restrike
- Good color rendering index (CRI)
- For further information about this product, please refer to the Data Sheet under "Downloads"

### Logistic

EAN / GTIN: 08727900926040

Weight: 0,52 kg

Length: 0.14 m

Width: 0.12 m

Height: 0.31 m

**Technical specifications:**

Voltage (lamps):	115 V
Nominal wattage:	2500 W
Base:	G-38
Lamp type:	Metal vapour lamp
Lamp specification:	Dimmable Hot restrike
Color temperature:	6000K
Color rendering index (CRI):	80 Ra
Burning position:	S180 (universal)
Lamp life:	500 h
Luminous flux:	240000 lm
Lamp current:	25,6 A
Dimensions (LxD):	240x60 mm
Weight:	0,31 kg
Legal specifications	
Special product:	Not designed for household room illumination
Intended use:	Show effect lighting