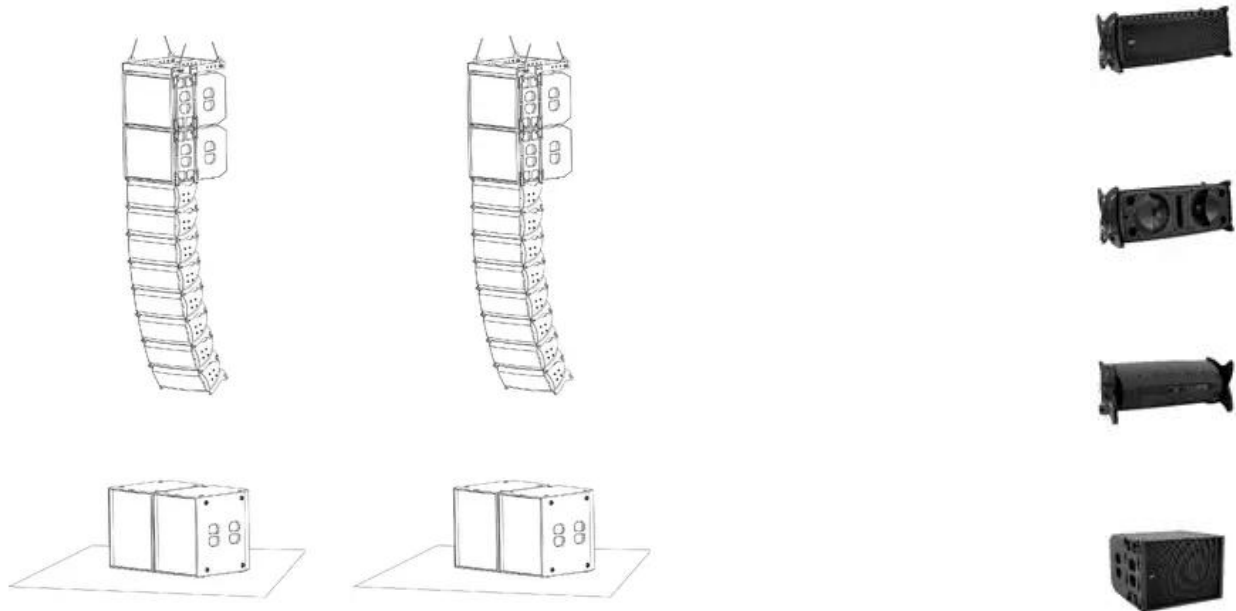


PSSO CLA Basic System MK2 L complete

Compact line array for permanent installations and touring purposes

Art.n.: 11041058

GTIN:

**Features :**

- Large basis set suitable for large open airs
- Time saving 2-man installation directly from the transport case
- Low weight of the whole construction and reduced demands for the flying points
- Tight locking pins eliminating vibration noise
- Flying hardware regularly tested by an independent and accredited testing institute
- The set includes four CLA-115 bass reflex subwoofers, four CLA-118 floor subwoofers and sixteen CLA-228 MKII tops as well as two matching flying brackets
- <p>PSSO CLA-118 Floor Subwoofer
- <h2 class="featureSatz">18" bassreflex subwoofer with 800 W RMS</h2>Powerful bassreflex subwoofer
- 45 cm woofer (18") with 115 mm voice coil with aluminum chassis
- Housing made of several layer 18 mm birch plywood
- Extremely rugged surface finish
- Integrated locking-system for optional wheel boards
- 8 rubber feet with fitting sinkings
- Carrello opzionale
- <p>PSSO CLA-115 LINE ARRAY Subwoofer
- <h2 class="featureSatz">15" bassreflex subwoofer with 500 W RMS</h2>Compact line array for permanent installations and touring purposes
- Powerful bassreflex subwoofer
- 38 cm woofer (15") with 100 mm voice coil with aluminum chassis
- Housing made of several layer 15 mm birch plywood
- Extremely rugged surface finish
- No disturbing steel parts due to U-Turn Rigging System
- Easy rigging with captive quick release pins
- Tight locking pins eliminating vibration noise

Logistica

- Flying hardware regularly tested by an independent and accredited testing institute
- Integrated locking-system for optional wheel boards
- 4 rubber feet with fitting sinkings on the top
- Carrello opzionale
- <p>PSSO Flying Bracket CLA-228/CLA-115
- <h2 class="featureSatz">Fitting flying bracket for PSSO Line Array systems CLA-228 and CLA-115</h2>Flying hardware regularly tested by an independent and accredited testing institute
- Verificato LGA
- <p>PSSO CLA-228 MK2 LINE ARRAY Top
- <h2 class="featureSatz">Top speaker, 2 x 8" woofer, 1.73" driver, MF: 300 W RMS, HF: 60 W RMS</h2>Improved MKII version with BEYMA drivers
- Compact line array for permanent installations and touring purposes
- Time saving 2-man installation directly from the transport case
- Lightweight housing due to high-quality plastic
- Low weight of the whole construction and reduced demands for the flying points
- Elegant housing design for avoiding resonance and standing waves
- Two powerful 20 cm low/mid neodymium magnets (2 x 8")
- 4.4 cm neodymium driver (1.73") with titanium diaphragm
- Specially designed waveguide
- Maximum efficiency due to biamped control
- Wide horizontal dispersion angle of 100°
- Curving adjustable between 0° and 12°
- Easy rigging with captive quick release pins
- Tight locking pins eliminating vibration noise
- Flying hardware regularly tested by an independent and accredited testing institute

Dati tecnici :

Intervallo di frequenza:	42 - 200 Hz
Peso:	53 kg
Misure:	Larghezza: 67 cm Profondità: 48 cm Altezza: 68 cm
Misure:	Larghezza: 67 cm Profondità: 28,5 cm Altezza: 28,5 cm
CLA-115:	
Rated power:	500 W RMS
Program power:	1000 W
Components:	38 cm woofer (15")
Connection:	2 Speaker sockets (4-pin)
Sensitivity:	98 dB
Maximum SPL:	125 dB
Impedance:	8 ohms
Dimensions (H x W x D):	480 x 670 x 680 mm
CLA-118:	
Rated power:	800 W RMS
Program power:	1600 W
Components:	45 cm woofer (18")
Connection:	2 Speaker sockets (4-pin)
Sensitivity:	97 dB

Maximum SPL:	126 dB
Impedance:	8 ohms
Dimensions (H x W x D):	740 x 580 x 730 mm
Weight:	56 kg
CLA-228MKII:	
MF rated power:	300 W RMS
HF rated power:	60 W RMS
MF program power:	600 W
HF program power:	120 W
Components:	2 x 20 cm woofer (2 x 8"), 4.4 cm driver (1.73")
Connection:	2 Speakon sockets (4-pin)
MF sensitivity:	96 dB
HF sensitivity:	104 dB
MF maximum SPL:	123 dB
HF maximum SPL:	124 dB
Impedance:	MF 16 ohms / HF 16 ohms
Crossover frequency:	1.8 kHz
Dispersion angle:	H=100°, V=3°
Dimensions (H x W x D):	285 x 670 x 285 mm
Weight:	18 kg
Flying bracket:	
Maximum load BGV C1 (8-fold):	400 kg
Maximum load BGV C1 (10-fold):	320 kg
Maximum load BGV C1 (12-fold):	260 kg
Dimensions (L x W x H):	680 x 632 x 62 mm
Weight:	17 kg

PSSO CLA-118 Floor Subwoofer

Capacità di carico:	Programma: 1600W Nominale: 800W RMS
Intervallo di frequenza:	38 - 200 Hz
Sensibilità:	97 dB (1W/1m)
Pressione acustica massima:	126 dB
Impedenza:	8 Ohm
Collegamenti:	Ingresso: Altoparlante via 2 x Presa da incasso per altoparlanti (F)
Altoparlante:	1 x 18" Woofer
Tipo di altoparlante:	Subwoofer
Tipologia di struttura:	Bass reflex
Ausilio di trasporto:	Carrello opzionale
Colore:	Nero, verniciato
Misure:	Larghezza: 58 cm Profondità: 73 cm Altezza: 74 cm

Peso:	58,45 kg
PSSO CLA-115 LINE ARRAY Subwoofer	
Capacità di carico:	Programma: 1000W Nominale: 500W RMS
Intervallo di frequenza:	42 - 200 Hz
Sensibilità:	98 dB (1W/1m)
Pressione acustica massima:	125 dB
Impedenza:	8 Ohm
Collegamenti:	Ingresso: Altoparlante via 2 x Presa da incasso per altoparlanti (F)
Altoparlante:	1 x 15" Woofer
Tipo di altoparlante:	Subwoofer
Tipologia di struttura:	Bass reflex
Ausilio di trasporto:	Carrello opzionale
Misure:	Larghezza: 66,8 cm Profondità: 68 cm Altezza: 48 cm
Peso:	49,85 kg

PSSO Flying Bracket CLA-228/CLA-115	
Carico massimo WLL (4 volte sup.):	800 kg
Misure:	Larghezza: 63,2 cm Profondità: 68 cm Altezza: 6,2 cm
Peso:	16,80 kg

PSSO CLA-228 MK2 LINE ARRAY Top	
Intervallo di frequenza:	68 - 20000 Hz
Sensibilità:	104 dB HF; 96 dB MF
Impedenza:	4/8 ohms biamp
Frequenza di taglio:	1800 Hz
Misure:	Larghezza: 67 cm Profondità: 28,5 cm Altezza: 28,5 cm
Peso:	19,15 kg
MF rated power:	300 W RMS
HF rated power:	60 W RMS
MF program power:	600 W
HF program power:	120 W
Components:	2 x 20 cm woofer (2 x 8"), 4.4 cm driver (1.73")
Connection:	2 Speakon sockets (4-pin)
MF maximum SPL:	123 dB

HF maximum SPL:	124 dB
Impedance:	MF 16 ohms / HF 8 ohms
Dispersion angle:	H=100°, V=3°

Contenuto della confezione:

1 x bass
1 x testata