



## EUROLITE LSD-37.5E IP44 (H)2.4m x (W)1.2m

LED soft displays (economy version)

Art.n.: 80503236

GTIN: 4026397428742

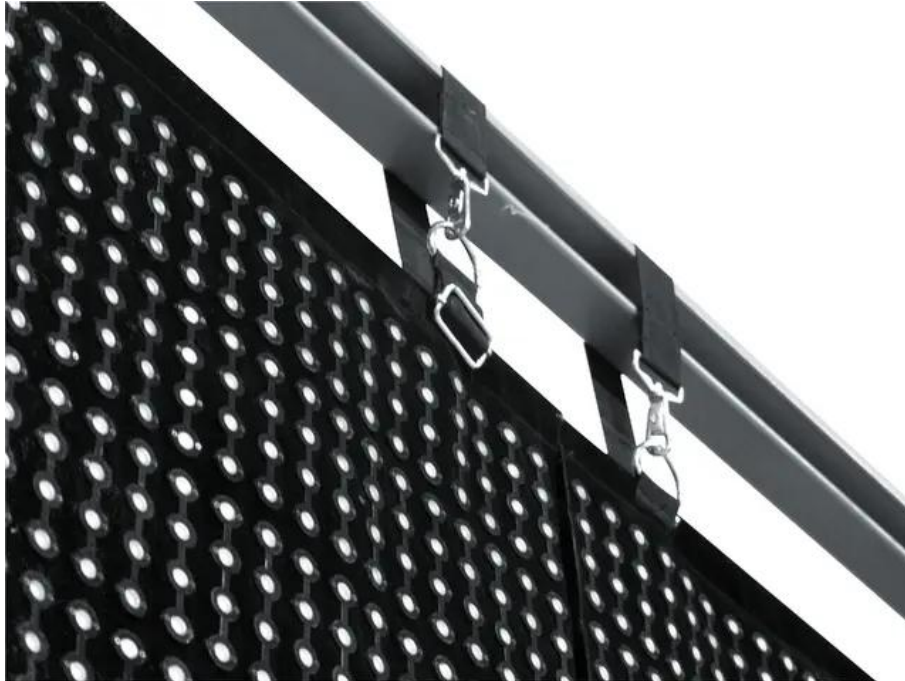

**L'articolo non è più disponibile.**

### Features :

- Inexpensive economy version of the successful LED soft displays
- Flexible displays with tri-color RGB LEDs (type SMD 3528) for bright and colorful projection of videos and graphics
- Modular display concept allows the build-up of large areas, ideal for outdoor use with large viewing distances
- Bendable and foldable PVC material suitable for various shapes, e.g. columns, circles, angles
- Proven connector system with push buttons and hook-and-loop connections
- Fast and uncomplicated installation, indoor and outdoor (IP44)
- Truss suspension via built-in belts
- Water-repellent and flame-resistant
- Low weight and small volume for convenient transport
- Easy maintenance - LEDs can be replaced without difficulty
- Controllable via optional network components and PC software
- All-in-one control system T9 (80503300): network interface and software LED Show T9 - ideal system for mobile use with notebooks with 1-gigabit NIC
- Control system LED studio: receiver interface (80503310), PCI sending card and software LED Studio (80503130)
- Recommended media software: MADRIX
- Switch-mode power supply for operation between 100 and 240 Volts
- Power output for passing on the power supply
- Available in different sizes and pixel pitches
- Custom sizes available upon request (in 0.6 m units)

### Logistica

EAN / GTIN: 4026397428742

Peso : 14,55 kg

Lunghezza : 0.89 m

Larghezza : 0.55 m

Altezza : 0.17 m

Dati tecnici :

|                            |                                                                |
|----------------------------|----------------------------------------------------------------|
| Alimentazione elettrica:   | 100-240 V AC, 50/60 Hz                                         |
| Potenza totale installata: | 16,00 W                                                        |
| Grado di protezione:       | IP44                                                           |
| Misure:                    | Larghezza: 120 cm<br>Altezza: 240 cm                           |
| Peso:                      | 12,80 kg                                                       |
| Resolution (W x H):        | 32 x 64 pixels                                                 |
| Pixel pitch:               | 37.5 mm                                                        |
| Pixel density:             | 711/m²                                                         |
| Pixel configuration:       | tri-color RGB LEDs, type SMD 3528                              |
| Lifetime:                  | approx. 100000 hours                                           |
| Display port:              | DVI/RJ45                                                       |
| Display mode:              | synchronous to video source                                    |
| Drive mode:                | 1/8 scan                                                       |
| Screen resolution:         | max. 1280 x 1024 (LED Studio)<br>max. 1024 x 896 (LED Show T9) |
| Brightness:                | 260 cd/m² (nits)                                               |
| Viewing angle:             | 120°                                                           |
| Frame rate:                | 60 Hz                                                          |
| Data refresh rate:         | 600 Hz                                                         |
| Colors:                    | 16.7 million (R 256, G 256, B 256)                             |
| Protection grade:          | IP44                                                           |
| Operating temperature:     | -10 to 45 °C                                                   |
| Humidity:                  | 10 to 90 %                                                     |
| Dimensions (W x H):        | 1200 x 2400 mm                                                 |
| Specifiche legali          |                                                                |
| Prodotto speciale:         | Non destinato all'illuminazione di ambienti domestici          |
| Destinazione d'uso:        | Illuminazione per effetti speciali                             |