


## RELACART ET-60 Bodypack with Lavalier Microphone for WAM-402

UHF pocket transmitter for model WAM-402, 823-832 + 863-865 MHz

Art. No.: 13055229

GTIN: 4026397650679

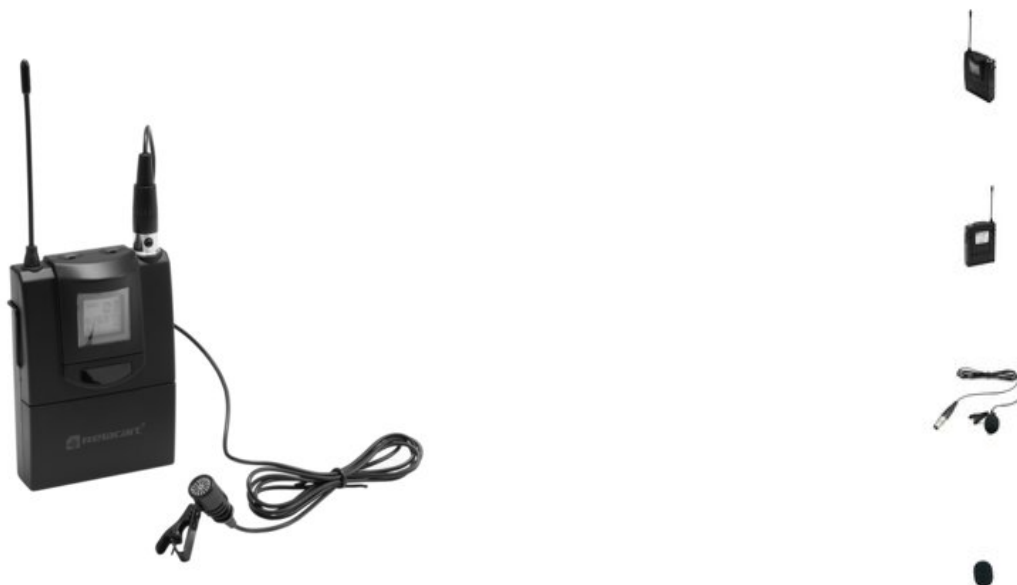

**List price: 172.55 €**

incl. 19% VAT.

### Features:

- Pilot frequency squelch technology delete wireless RF interference
- 10 groups with 90 fixed frequencies within 11 MHz switching bandwidth
- Easy and error-free synchronization between receiver and transmitter via infrared signal
- LED for battery status, frequency, channel and group
- UHF 823 - 832 MHz License-free and approved in large parts of Europe
- UHF 863 - 865 MHz License-free and approved in Europe
- Up to 8 transmitters can be operated in parallel without interference

#### **transmitter**

- Operating range up to 80m

#### **Microphone**

- Polar pattern: Cardioid

#### **Package contents**

- 1 x transmitter, 1 x microphone, 1 x windshield, 1 x user manual, 1 x declaration of conformity

### Logistic

EAN / GTIN: 4026397650679

Weight: 0,25 kg

Length: 0.29 m

Width: 0.12 m

Height: 0.07 m

### Technical specifications:

Type:	Bodypack with microphone
Power consumption:	0,42 W
Frequency band:	UHF 823 - 832 MHz; UHF 863 - 865 MHz
Switching bandwidth:	11 MHz
Parallel mode:	Max. 8 transmitter
RF power output:	10 mW

Modulation:	FM
Frequency selection:	90 Switchable frequencies In 10 groups with up to 10 preset frequencies each
Weight:	110 g
<b>Transmitter</b>	
Power supply:	3 V DC
Power connection:	Battery/battery pack
Battery:	2 x Mignon (AA) (not included)
Range:	Range up to 80m
Control elements:	Transmitter power switch (high-low)
Switch:	On/off switch; Mic/Ins switch
Material:	Plastic
Color:	Black
Dimensions:	Width: 6,5 cm Depth: 2,5 cm Height: 9,5 cm
Weight:	86 g
<b>Microphone</b>	
Type:	Lavalier microphone
Cable length:	1,20 m
Capsule type:	Electret
Polar pattern:	Cardioid
Frequency range:	60 - 12000 Hz
Sensitivity:	-42 dB
Connector type:	Mini XLR (F) 4-pin
Material:	Metal
Color:	Black
Weight:	20 g