




GE  
Lighting

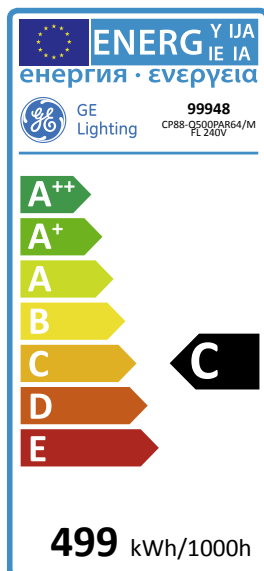

499  
kWh/1000h

C  
energy class

## PAR 64 CP88-Q500PAR64/MFL 240V 99948

### Product information

PAR lamps provide a robust and flexible design solution for a wide range of applications. Choice of PAR36, PAR46, PAR56 or PAR64

- 3000 K or 4200 K colour temperature
- Choice of beam widths
- Excellent colour rendering
- High efficiency combined with low operating costs
- Robust and reliable
- UV control
- Easy retrofit
- Colour consistent throughout life
- Colour blends with halogen and fluorescent

### Application areas



Club and Disco



## Product data

Cap/Base	GX16d
Bulb Shape	PAR
Bulb Diameter [mm]	204
Maximum Overall Length [mm]	150
Light Center Length [mm]	80
Net weight per piece [g]	821
Gross weight per piece [g]	1072
Brand	General Electric (GE)

## Performance data

Colour Rendering Index (CRI) [Ra]	100
Nominal correlated colour temperature (CCT) [K]	3200
Nominal beam angle [°]	21
Nominal center beam candlepower (CBCP) [cd]	65000
Energy efficiency class (EEC)	C
Rated Life [h]	300
Weighted energy consumption [kWh/1000h]	498.86

## Electrical data

Nominal power [W]	500
Nominal lamp voltage [V]	240
Coil type	C-13
Dimming Capability	Yes
Ballast Required	No

## Logistic data

DUN Code	10043168999486
EAN Code	0043168999489
Pack Quantity	6
Layer quantity	24 EUR, 30 UK
Layer quantity EUR	24
Layer quantity UK	30
Pallet quantity EUR (PC)	120
Pallet quantity UK (PC)	150
Outer case size	536 x 391 x 196 (mm)
Product status	Available

## Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Entertainment Solution Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

## Disclaimer

Special purpose lamp – Stage Studio. Not suitable for household illumination.