

Product selected: BA 575 SE HR

BriteArc Single Ended Hot Restrike lamps are compact light sources, designed for optimum optical efficiency. The BriteArc lamps are filled with mercury and rare earth elements to obtain a high efficacy and a stable colour with a very good rendering index. They can be re-struck at any time with a voltage peak from 25 to 55 kV. These lamps can be operated in any position.

Applications

- TV-Studio lighting
- Photo studios
- Show lighting
- Theatre
- Follow spots

Features

- High luminous efficacy
- Low infrared
- Colour stability
- Excellent lumen maintenance
- Physical ruggedness
- Hot restrike

Directions for use

- Burning position: universal
- Only use in closed fixtures
- Can be operated on an electronic power supply or on a magnetic ballast

Product Attributes


Item description	BA 575 SE HR
Ordering Code	0023932
EAN code	5410288239323
Packing Quantity	10
Watt. (W)	575
Volt. (V)	95
Cap	G22
Max. Over. Length (mm)	145
Diameter (mm)	30
Light output (lm)	49000
Current (A)	6.95
Average life (hours)	750
Repl. Time	1000
Colour Temp (K)	5600
CRI	1A
Arc Gap	7

Burning Position

Product Image



Line Drawing

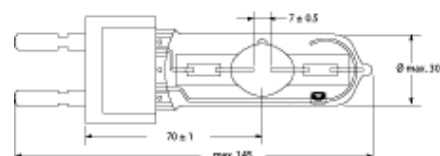

Lamp Cap

G22

