


ALUTRUSS QUADLOCK 6082 Karree 3,5x3,5x3m

Art. No.: 09009944

GTIN:



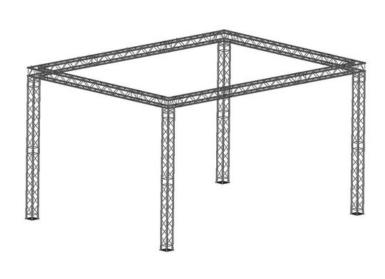







The article is no longer in our assortment.

Features: Logistic

ALUTRUSS QUADLOCK 6082L-30 3-Way Corner 90°

4-point truss system

- Strong EN-AW 6082 alloy for high loads
- High-quality aluminum-tubes with 50 mm in diameter
- Low weight
- Distance center center: 240 mm
- Easy installation
- Trusspipe: 50 mm
- Made in Europe
- For application areas such as: Theater; Trade fair and shop fitting; Clubs/dancing school

Package contents

- 2 x connection Set

ALUTRUSS QUADLOCK End Plate QQGP-Male

- Trusspipe: 50 mm
- Made in Europe

cone

- M8 thread

ALUTRUSS QUADLOCK 6082-2500 4-Way Cross Beam

4-point truss system

- Strong EN-AW 6082 alloy for high loads

- High-quality aluminum-tubes with 50 mm in diameter
- Low weight
- Distance center center: 240 mm
- Easy installation
- Trusspipe: 50 mm
- TÜV Süd certified
- For application areas such as: Theater; Trade fair and shop fitting; Clubs/dancing school
- For further information about this product, please refer to the Data Sheet under "Downloads"

Package contents

- 1 x connection Set

Technical specifications:

Weight: 132,40 kg

ALUTRUSS QUADLOCK 6082L-30 3-Way Corner 90°

Easy installation
50 mm x 2 mm
Alu colored
16 x 2mm
Length: 50 cm
Width: 50 cm
Height: 50 cm
7,95 kg

ALUTRUSS QUADLOCK End Plate QQGP-Male

Trusspipe:	50 mm
Color:	Alu colored
Weight:	1,45 kg
Cone	
Thread:	M8 thread

ALUTRUSS QUADLOCK 6082-2500 4-Way Cross Beam

Setup:	Easy installation
Trusspipe:	50 mm x 2 mm
Welding technique:	TIG-welding
Welding material:	AIMg 5
Alloy:	AIMgSi1 T6
Color:	Alu colored
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 2,5 m
	Width: 29 cm
	Height: 29 cm
Weight:	11,85 kg